

# HAKI Component list NO

## Contents

|                                |    |
|--------------------------------|----|
| HAKI UNIVERSAL                 | 3  |
| HAKI UNIVERSAL S4 ALUMINIUM    | 21 |
| HAKI UNIVERSAL S6 ALUMINIUM    | 24 |
| HAKI UNIVERSAL APPLICATIONS    | 26 |
| HAKI FRAME                     | 40 |
| TUBE & FITTING                 | 45 |
| HAKITEC 750 WEATHER PROTECTION | 46 |
| TKS 750 WEATHER PROTECTION     | 52 |
| HAKITEC SHEETING               | 54 |
| OTHER ITEMS                    | 56 |



HAKI reserves the right to make technical modifications on a continual basis.

**Base jacks**

|                  | Code | Finish | Item No.       | Weight |
|------------------|------|--------|----------------|--------|
| <b>Base jack</b> | BS   | G      | <b>2071000</b> | 5,0    |
| Adjustable       | BSL  | G      | <b>2073003</b> | 9,2    |
| BS=55-570 mm     |      |        |                |        |
| BSL=40-650 mm    |      |        |                |        |


**Standards**

|                                    |        | Finish | Item No.       | Weight |
|------------------------------------|--------|--------|----------------|--------|
| <b>Standard S</b>                  | S 500  | G      | <b>7016050</b> | 2,9    |
| Standard joint with spigot Ø 38 mm | S 1000 | G      | <b>7016100</b> | 5,3    |
| Tube diameter 48 mm                | S 1500 | G      | <b>7016150</b> | 7,7    |
|                                    | S 2000 | G      | <b>7016200</b> | 10,1   |
|                                    | S 3000 | G      | <b>7016300</b> | 15,2   |


**Locking pin**

Diameter 16 mm

For reinforcing standard joint in connection with tensile load, e.g. when scaffolding is suspended when lifting or when scaffolding is used for temporary roof



Spring clip 16

Locking pin

G

**2116000**

0,2

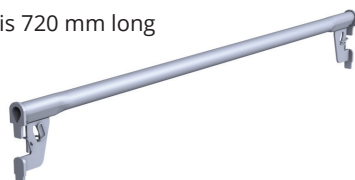
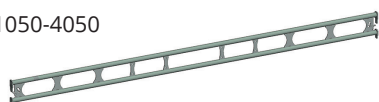
G

**5141257**

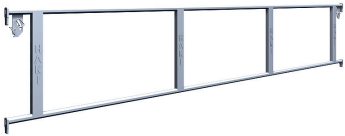

0,3

**Beams**

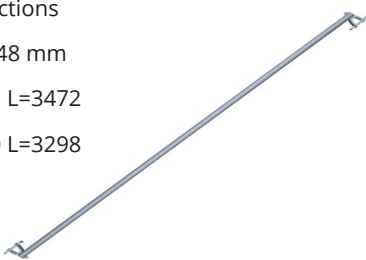
|                              |      | Finish | Item No.       | Weight |
|------------------------------|------|--------|----------------|--------|
| <b>Ledger beam</b>           | 1050 | G      | <b>7021102</b> | 4,8    |
| With spring locking catch    | 1250 | G      | <b>7021122</b> | 6,5    |
| Tube diameter 34 mm          | 1655 | G      | <b>7021162</b> | 6,7    |
| Beams from 1050-4050         | 1964 | G      | <b>7021192</b> | 8,0    |
|                              | 2500 | G      | <b>7021252</b> | 10,9   |
|                              | 3050 | G      | <b>7021302</b> | 12,3   |
|                              | 3650 | G      | <b>7021361</b> | 22,6   |
|                              | 4050 | G      | <b>7021401</b> | 24,8   |
| <b>Single ledger</b>         | 564  | G      | <b>7022050</b> | 3,1    |
| With spring locking catch    | 700  | G      | <b>7022066</b> | 3,3    |
| Tube diameter 48 mm          | 770  | G      | <b>7022073</b> | 3,6    |
| Beams from 564-3050          | 1050 | G      | <b>7022101</b> | 4,4    |
| Note: 7022066 is 650 mm long | 1250 | G      | <b>7022121</b> | 5,1    |
| Note: 7022073 is 720 mm long | 1655 | G      | <b>7022161</b> | 6,3    |
|                              | 1964 | G      | <b>7022191</b> | 7,3    |
|                              | 2500 | G      | <b>7022246</b> | 9,9    |
|                              | 3050 | G      | <b>7022301</b> | 11,3   |




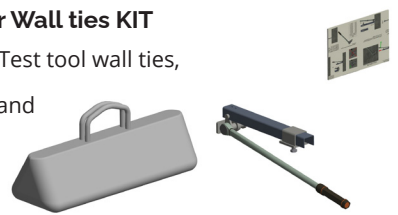
**Guardrails**

|                                                                                    |      | Finish | Item No.       | Weight |
|------------------------------------------------------------------------------------|------|--------|----------------|--------|
| <b>Guardrail frame GFL</b>                                                         | 564  | G      | <b>7052056</b> | 3,1    |
| With spring locking catch                                                          | 700  | G      | <b>7052070</b> | 3,8    |
| Tube octagon 28 mm                                                                 | 770  | G      | <b>7052077</b> | 4,0    |
| Note: 7052070 is 650 mm long                                                       | 1050 | G      | <b>7052106</b> | 4,9    |
| Note: 7052077 is 720 mm long                                                       | 1250 | G      | <b>7052124</b> | 5,7    |
|   | 1655 | G      | <b>7052164</b> | 7,4    |
|                                                                                    | 1964 | G      | <b>7052194</b> | 8,1    |
|                                                                                    | 2357 | G      | <b>7052232</b> | 8,9    |
|                                                                                    | 2500 | G      | <b>7052254</b> | 9,2    |
|                                                                                    | 3050 | G      | <b>7052304</b> | 10,5   |
| <b>Safety gate mesh SGF</b>                                                        | 564  | G      | <b>7055050</b> | 9,7    |
| Continuously adjustable 118 mm vertically in                                       | 1050 | G      | <b>7055101</b> | 13,3   |
| order to be adaptable to different decking                                         | 1250 | G      | <b>7055121</b> | 14,6   |
| Jaw width 22 mm                                                                    | 1655 | G      | <b>7055161</b> | 17,0   |
|  | 1964 | G      | <b>7055191</b> | 19,4   |
|                                                                                    | 2500 | G      | <b>7055250</b> | 23,2   |
|                                                                                    | 3050 | G      | <b>7055300</b> | 26,8   |

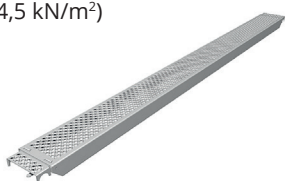
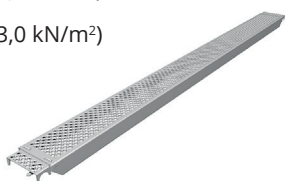
**Braces**


|                                           |                                                                                     | Finish | Item No.       | Weight |
|-------------------------------------------|-------------------------------------------------------------------------------------|--------|----------------|--------|
| <b>Diagonal brace DS</b>                  | 700/770                                                                             | G      | <b>7122074</b> | 8,1    |
| With wedge junctions. Tube diameter 48 mm | 1250                                                                                | G      | <b>7122124</b> | 9,0    |
| DS 700/770 L=1707                         | 1655                                                                                | G      | <b>7122164</b> | 10,1   |
| DS 1250 L=2004                            | 1964                                                                                | G      | <b>7122194</b> | 10,9   |
| DS 1655 L=2285                            | 2500                                                                                | G      | <b>7121254</b> | 12,6   |
| DS 1964 L=2523                            | 3050                                                                                | G      | <b>7121304</b> | 14,3   |
| DS 2500 L=2967                            | 3650                                                                                | G      | <b>7121364</b> | 16,2   |
| DS 3050 L=3450                            | 4050                                                                                | G      | <b>7121404</b> | 17,5   |
| DS 3650 L=3988                            |  |        |                |        |
| DS 4050 L=4357                            |                                                                                     |        |                |        |
| <b>Plan brace HDS</b>                     | 3050x1655                                                                           | G      | <b>7141000</b> | 13,8   |
| With wedge junctions                      | 3050x1250                                                                           | G      | <b>7141001</b> | 13,2   |
| Tube diameter 48 mm                       |  |        |                |        |
| HDS 3050x1655 L=3472                      |                                                                                     |        |                |        |
| HDS 3050x1250 L=3298                      |                                                                                     |        |                |        |

**Tying-in**

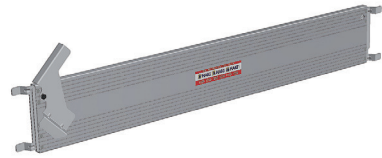
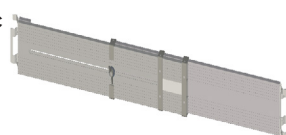
|                                                                                     |                | Finish | Item No.       | Weight |
|-------------------------------------------------------------------------------------|----------------|--------|----------------|--------|
| <b>Tie rod tube SVF</b>                                                             | 450x48         | G      | <b>8832046</b> | 2,2    |
| Tube diameter 48 mm                                                                 | 600x48         | G      | <b>8832061</b> | 2,6    |
| Hook diameter 16 mm                                                                 | 900x48         | G      | <b>8832091</b> | 3,7    |
| Permissible load 9 kN                                                               | 1200x48        | G      | <b>8832121</b> | 4,8    |
| Erected with right angle coupler 48x48                                              |                |        |                |        |
|    |                |        |                |        |
| <b>Tie rod tube adjustable</b>                                                      |                | G      | <b>8832110</b> | 4,9    |
| Adjustable 650 - 1100 mm                                                            |                |        |                |        |
| Hook diameter 16 mm                                                                 |                |        |                |        |
| Permissible load 5,2 kN                                                             |                |        |                |        |
| Erected with right angle coupler 48x48                                              |                |        |                |        |
|    |                |        |                |        |
| <b>Wall tie VST</b>                                                                 | 1000           | G      | <b>7111100</b> | 5,3    |
| With flexible plate                                                                 | 2000           | G      | <b>7111200</b> | 9,1    |
| Tube diameter 48 mm                                                                 | 3000           | G      | <b>7111300</b> | 13,7   |
| Erected with right angle coupler 48x48                                              | 4000           | G      | <b>7111400</b> | 16,7   |
|                                                                                     | 5000           | G      | <b>7111500</b> | 21,9   |
| For permissible load, see product data sheet                                        | 6000           | G      | <b>7111600</b> | 24,5   |
|    |                |        |                |        |
| <b>Reinforcing tube for Wall tie</b>                                                |                | Fzv    | <b>8831500</b> | 11,00  |
| Maximum load perpendicular to attached tube 9 kN                                    |                |        |                |        |
| Torque 50 Nm                                                                        |                |        |                |        |
|  |                |        |                |        |
| <b>Test tool for Wall ties KIT</b>                                                  |                |        | <b>2051058</b> | 6,0    |
| Kit includes: Test tool wall ties, Instructions and Bag                             |                |        |                |        |
|  |                |        |                |        |
| <b>Test tool Wall tie eye 350 Nm</b>                                                |                |        | <b>2051052</b> | 2,5    |
|  |                |        |                |        |
| <b>Ringbolt</b>                                                                     | Ringbolt L=100 |        | <b>6130052</b> | 0,1    |
| Eye bolt with thickness 10 mm and eye diameter 20 mm.                               |                |        |                |        |
| Steel quality 8.8. Elzink.                                                          |                |        |                |        |
| 100 pcs per package                                                                 |                |        |                |        |

**Decking**




|                                                                                                                                                                                                                                                                           |             | Finish | Item No.       | Weight |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------|----------------|--------|
| <b>Decking unit AL</b><br>                                                                                                                                                               | 1250x498x55 | AL     | <b>2021145</b> | 7,8    |
|                                                                                                                                                                                                                                                                           | 1250x398x55 | AL     | <b>2021146</b> | 6,6    |
|                                                                                                                                                                                                                                                                           | 1250x595x55 | AL     | <b>2021164</b> | 8,4    |
| <b>Wind clips for secure scaffold deck AL</b><br>                                                                                                                                        |             |        | <b>6130617</b> | 0,06   |
| <b>Composite decking unit</b><br>It can also be supplied with the customer's own company logo<br>                                                                                        | 1250x490    |        | <b>2021406</b> | 8,0    |
| <b>Ladder ST</b><br>For decking unit with hatch<br>                                                                                                                                     | 2100        | AL     | <b>2091210</b> | 3,4    |
| <b>AL plank B=170 mm</b><br>L=564-2500 - Load class 6 (6,0 kN/m <sup>2</sup> )<br>L=3050 - Load class 5 (4,5 kN/m <sup>2</sup> )<br>                                                   | 564x170x90  | AL     | <b>2153056</b> | 2,9    |
|                                                                                                                                                                                                                                                                           | 770x170x90  | AL     | <b>2153081</b> | 3,3    |
|                                                                                                                                                                                                                                                                           | 1050x170x90 | AL     | <b>2153106</b> | 4,3    |
|                                                                                                                                                                                                                                                                           | 1250x170x90 | AL     | <b>2153126</b> | 4,8    |
|                                                                                                                                                                                                                                                                           | 1655x170x90 | AL     | <b>2153166</b> | 6,0    |
|                                                                                                                                                                                                                                                                           | 1964x170x90 | AL     | <b>2153196</b> | 6,8    |
|                                                                                                                                                                                                                                                                           | 2500x170x90 | AL     | <b>2153247</b> | 8,3    |
|                                                                                                                                                                                                                                                                           | 3050x170x90 | AL     | <b>2153306</b> | 9,8    |
| <b>AL plank B=230 mm</b><br>L=564-1964 - Load class 6 (6,0 kN/m <sup>2</sup> )<br>L=2500 - Load class 5 (4,5 kN/m <sup>2</sup> )<br>L=3050 - Load class 4 (3,0 kN/m <sup>2</sup> )<br> | 564x230x90  | AL     | <b>2153055</b> | 3,4    |
|                                                                                                                                                                                                                                                                           | 700x230x90  | AL     | <b>2153076</b> | 3,8    |
|                                                                                                                                                                                                                                                                           | 770x230x90  | AL     | <b>2153080</b> | 4,1    |
|                                                                                                                                                                                                                                                                           | 1050x230x90 | AL     | <b>2153100</b> | 5,0    |
|                                                                                                                                                                                                                                                                           | 1250x230x90 | AL     | <b>2153120</b> | 5,6    |
|                                                                                                                                                                                                                                                                           | 1655x230x90 | AL     | <b>2153160</b> | 6,9    |
|                                                                                                                                                                                                                                                                           | 1964x230x90 | AL     | <b>2153190</b> | 7,8    |
|                                                                                                                                                                                                                                                                           | 2500x230x90 | AL     | <b>2153245</b> | 9,5    |
|                                                                                                                                                                                                                                                                           | 3050x230x90 | AL     | <b>2153300</b> | 11,2   |

|                                                                                     |                                                     | Finish | Item No.       | Weight |
|-------------------------------------------------------------------------------------|-----------------------------------------------------|--------|----------------|--------|
| <b>Hatch plan AL B=690 mm</b>                                                       | 1250x690                                            | AL     | <b>4098123</b> | 19,9   |
|                                                                                     | L=1250-1655 - Load class 6 (6,0 kN/m <sup>2</sup> ) | AL     | <b>4098163</b> | 23,7   |
|                                                                                     | L=1964 - Load class 4 (3,0 kN/m <sup>2</sup> )      | AL     | <b>4098193</b> | 26,6   |
|                                                                                     | L=2500-3050 - Load class 3 (2,0 kN/m <sup>2</sup> ) | AL     | <b>4098253</b> | 31,6   |
|                                                                                     |                                                     | AL     | <b>4098303</b> | 36,7   |
|    |                                                     |        |                |        |
| <b>AL ramp</b>                                                                      | 1400x500                                            | AL     | <b>2157004</b> | 7,8    |
|                                                                                     | 1400x600                                            | AL     | <b>2157005</b> | 10,3   |
|    |                                                     |        |                |        |
| <b>Corner bracket</b>                                                               | 564x564                                             |        | <b>4011020</b> | 4,5    |
|                                                                                     | 770x770                                             |        | <b>4011021</b> | 7,3    |
|                                                                                     | 1250x1250                                           |        | <b>4011022</b> | 14,5   |
|   |                                                     |        |                |        |
| <b>Light deck B=600 mm</b>                                                          | 1250                                                | AL     | <b>4071128</b> | 9,1    |
|                                                                                     | With aluminum frame and                             | AL     | <b>4071168</b> | 11,1   |
|                                                                                     | composite board                                     | AL     | <b>4071198</b> | 12,5   |
|                                                                                     | With locking in each end                            | AL     | <b>4071268</b> | 15,8   |
|                                                                                     |                                                     | AL     | <b>4071308</b> | 18,5   |
|  |                                                     |        |                |        |
| <b>Light deck with hatch B=600 mm</b>                                               | 1655                                                | AL     | <b>4071169</b> | 13,2   |
|                                                                                     | With aluminum frame and                             | AL     | <b>4071199</b> | 14,5   |
|                                                                                     | composite board                                     | AL     | <b>4071269</b> | 17,0   |
|                                                                                     | With locking in each end                            | AL     | <b>4071309</b> | 19,6   |
|                                                                                     |                                                     |        |                |        |
|  |                                                     |        |                |        |

**Toeboards**

|                                     |                                                                                     | Finish | Item No.       | Weight |
|-------------------------------------|-------------------------------------------------------------------------------------|--------|----------------|--------|
| <b>Toeboard</b>                     | FL 3300x150x32                                                                      |        | <b>2025331</b> | 5,6    |
| Wood, yellow glazing paint          |    |        |                |        |
| <b>Toeboard</b>                     | FL 1300x150x32                                                                      |        | <b>2025133</b> | 2,7    |
| Toeboards with color and logo       | FL 3300x150x32                                                                      |        | <b>2025333</b> | 8,0    |
| according to customer specification |                                                                                     |        |                |        |
| <b>Toeboard Aluminium</b>           | 300                                                                                 | AL     | <b>4161031</b> | 0,7    |
|                                     | 564                                                                                 | AL     | <b>4161051</b> | 1,0    |
|                                     | 700                                                                                 | AL     | <b>4161071</b> | 1,3    |
|                                     | 770                                                                                 | AL     | <b>4161077</b> | 1,4    |
|                                     | 1050                                                                                | AL     | <b>4161105</b> | 1,9    |
|                                     | 1250                                                                                | AL     | <b>4161121</b> | 2,2    |
|                                     | 1655                                                                                | AL     | <b>4161161</b> | 2,9    |
|                                     | 1964                                                                                | AL     | <b>4161191</b> | 3,5    |
|                                     | 2357                                                                                | AL     | <b>4161231</b> | 4,2    |
|                                     | 2500                                                                                | AL     | <b>4161251</b> | 4,6    |
|                                     | 3050                                                                                | AL     | <b>4161301</b> | 5,5    |
|                                     |    |        |                |        |
| <b>Toeboard telescopic</b>          | 1200-1964                                                                           | AL     | <b>2026020</b> | 5,0    |
|                                     | 1900-3050                                                                           | AL     | <b>2026021</b> | 7,3    |
|                                     |  |        |                |        |
| <b>Toeboard clip</b>                |                                                                                     |        |                |        |
| Spring steel                        |                                                                                     | G      | <b>2131003</b> | 0,1    |
|                                     |  |        |                |        |
| Plastic                             | LFP 150x32                                                                          |        | <b>2131001</b> | 0,2    |
|                                     |  |        |                |        |
| For corner solution - Fzv           |                                                                                     | G      | <b>2131002</b> | 0,7    |
|                                     |  |        |                |        |
| <b>Toeboard clip</b>                | LF 70                                                                               | G      | <b>7161006</b> | 1,0    |
|                                     | LF 70 short                                                                         | G      | <b>7161012</b> | 0,7    |
|                                     |  |        |                |        |
| <b>Toeboard clip</b>                |                                                                                     | G      | <b>1162002</b> | 0,4    |
| With nut 19 mm                      |  |        |                |        |

**Brackets**

|                                                                                                                                                                                       |                                                                                     |              | Finish | Item No.       | Weight |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------|--------|----------------|--------|
| <b>Bracket without spigot</b><br>Tube diameter 48 mm<br>With spring locking catch                                                                                                     |    | SK 230       | G      | <b>7211025</b> | 1,6    |
|                                                                                                                                                                                       |                                                                                     | SK 300       | G      | <b>7211033</b> | 2,0    |
|                                                                                                                                                                                       |                                                                                     | SK 334       | G      | <b>7211035</b> | 2,0    |
|                                                                                                                                                                                       |                                                                                     | SK 400       | G      | <b>7211041</b> | 2,1    |
|                                                                                                                                                                                       |                                                                                     | SK 460       | G      | <b>7211045</b> | 2,3    |
|                                                                                                                                                                                       |                                                                                     | SK 600       | G      | <b>7211061</b> | 2,7    |
| <b>Bracket with spigot</b><br>Tube diameter 48 mm<br>With spring locking catch                                                                                                        |    | SK 564       | G      | <b>7211051</b> | 5,8    |
|                                                                                                                                                                                       |                                                                                     | SK 700       | G      | <b>7211067</b> | 5,9    |
|                                                                                                                                                                                       |                                                                                     | SK 770       | G      | <b>7211071</b> | 6,5    |
| <b>Bracket adjustable</b><br>Adjustable 460 - 690 mm<br>Load class 3 (2,0 kN/m <sup>2</sup> )<br>NB! Not to be assembled on<br>HAKI Universal AL Standard                             |   | SK 460-690   | G      | <b>7211069</b> | 4,1    |
|                                                                                                                                                                                       |                                                                                     |              |        |                |        |
| <b>Bracket diagonal</b><br>To be combined with<br>Single Ledger 1250 or<br>Ledger Beam 1250                                                                                           |  | SKD 1250     | G      | <b>7212001</b> | 11,1   |
|                                                                                                                                                                                       |                                                                                     |              |        |                |        |
| <b>Corner bracket</b><br>Adjustable between<br>2 and 3 boards<br>Compatible with most of HAKI's<br>fixed and adjustable brackets<br>See the product sheet for the HAKI Corner Bracket |  | SMST 400-600 | G      | <b>7211084</b> | 11,6   |
|                                                                                                                                                                                       |                                                                                     | SMST 460-690 | G      | <b>7211080</b> | 13,6   |
| <b>Corner bracket</b><br>Inner corner console - 2 board<br>Jaw width 22 mm                                                                                                            |  | SKH 460      | G      | <b>7211046</b> | 6,7    |
|                                                                                                                                                                                       |                                                                                     |              |        |                |        |

|                       | Finish | Item No.       | Weight |
|-----------------------|--------|----------------|--------|
| <b>Corner bracket</b> | G      | <b>7211053</b> | 18,0   |

Inner corner console - 3 board

Jaw width 22 mm



### Combi-bracket KK

For decking with RAM-plan

700

G

**7211065**

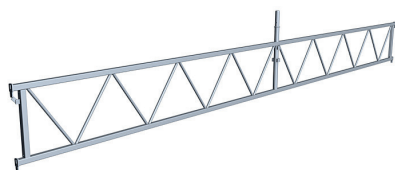
9,3



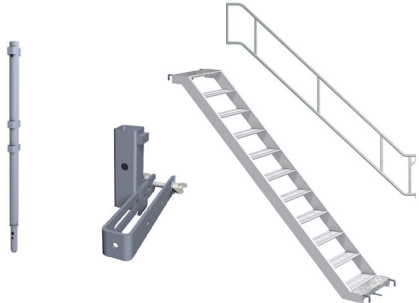
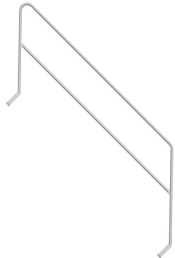

## Lattice beams

|                     | Finish | Item No.       | Weight |
|---------------------|--------|----------------|--------|
| <b>Lattice beam</b> | G      | <b>7031602</b> | 59,1   |


500/6100





**Stairs & Ladders**


|                                                                                                                                                                                    |                                          | Finish | Item No.       | Weight |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|--------|----------------|--------|
| <b>UTV Stair AL</b><br>With platform and locking<br>Width 600 mm<br>                              | UTV Handrail 2500x2000                   | AL     | <b>4058245</b> | 9,2    |
|                                                                                                                                                                                    | UTV Handrail 3050x2000                   | AL     | <b>4058300</b> | 10,3   |
|                                                                                                                                                                                    | UTV Handrail 3050x1500                   | AL     | <b>4058150</b> | 9,3    |
|                                                                                                                                                                                    | UTV Stair 2500x2000                      | AL     | <b>4102247</b> | 22,9   |
|                                                                                                                                                                                    | UTV Stair 3050x2000                      | AL     | <b>4102302</b> | 29,2   |
|                                                                                                                                                                                    | UTV Stair 3050x1500 with anti-slip steps | AL     | <b>2153039</b> | 26,0   |
|                                                                                                                                                                                    | UTV Stair 3050x2000 with anti-slip steps | AL     | <b>2153040</b> | 22,0   |
|                                                                                                                                                                                    | Handrail post LSS 1000                   | G      | <b>7015102</b> | 4,2    |
|                                                                                                                                                                                    | Bracket Handrail post LSS-UTV            | G      | <b>7058300</b> | 1,5    |
| <b>UTV Stair</b><br>With platform and locking at the top<br>LxH 3050x2000 mm<br>Width 600 mm<br> | UTV Stair 3050x2000                      | G      | <b>2092200</b> | 39,7   |
|                                                                                                                                                                                    | Handrail HL 3050x2000                    | G      | <b>2161300</b> | 19,3   |
|                                                                                                                                                                                    | Handrail post LSS 1000                   | G      | <b>7015102</b> | 4,2    |
|                                                                                                                                                                                    | Bracket Handrail post LSS-UTV            | G      | <b>8752001</b> | 2,5    |
| <b>UTV Handrail inner</b><br>Width 600 mm<br>For Stair UTV AL and UTV<br>                       | For UTV Stair AL 3050x2000               | G      | <b>7058253</b> | 11,4   |
|                                                                                                                                                                                    | For UTV Stair steel 3050x2000            | G      | <b>7058254</b> | 11,5   |
|                                                                                                                                                                                    | For UTV Stair AL 2500x2000               | G      | <b>7058256</b> | 10,4   |
| <b>UTV Stair AL</b><br>With platform and locking<br>at the top<br>Width 600 mm<br>              | UTV 500                                  | AL     | <b>4102055</b> | 7,5    |
|                                                                                                                                                                                    | UTV 1000                                 | AL     | <b>4102105</b> | 11,2   |
|                                                                                                                                                                                    | UTV 1500                                 | AL     | <b>4102155</b> | 16,1   |
| <b>Entrance step</b><br>                                                                        | 700/770                                  | G      | <b>7103065</b> | 7,8    |
|                                                                                                                                                                                    | 1250                                     | G      | <b>7103120</b> | 11,1   |
|                                                                                                                                                                                    | 1655                                     | G      | <b>7103160</b> | 14,7   |

|                                     |                                                                                     |                 | Finish | Item No.       | Weight |
|-------------------------------------|-------------------------------------------------------------------------------------|-----------------|--------|----------------|--------|
| <b>STV Ladder with landing</b>      |    | STV 1250        | G      | <b>7083202</b> | 12,5   |
| With platform and locking           |                                                                                     | STV 1655        | G      | <b>7083203</b> | 17,1   |
| at the top                          |                                                                                     |                 |        |                |        |
| LxH 1250x2000 mm or 1655x2000 mm    |                                                                                     |                 |        |                |        |
| Width 475 mm                        |                                                                                     |                 |        |                |        |
| <b>Ladder B=45cm AL</b>             |                                                                                     | L=3,0 m         | AL     | <b>581030</b>  | 5,3    |
|                                     |                                                                                     | L=3,9 m         | AL     | <b>581040</b>  | 7,3    |
|                                     |                                                                                     | L=4,8 m         | AL     | <b>581050</b>  | 10,9   |
|                                     |                                                                                     | L=6,0 m         | AL     | <b>581060</b>  | 15,0   |
| <b>SS Suspension device</b>         |                                                                                     |                 |        |                |        |
|                                     |                                                                                     |                 | Finish | Item No.       | Weight |
| <b>SS Suspension device grating</b> |    |                 | G      | <b>7171001</b> | 2,4    |
| Permissible load 20,0 kN            |                                                                                     |                 |        |                |        |
| <b>SS Clamp H-beam</b>              |  | 80-180          | G      | <b>7172100</b> | 5,1    |
| Permissible load 20,0 kN            |                                                                                     | 150-300         | G      | <b>7172000</b> | 6,8    |
|                                     |                                                                                     | 300-450         | G      | <b>7172001</b> | 7,6    |
| <b>SS Clamp L-beam</b>              |  | 60-120          | G      | <b>7176000</b> | 5,3    |
| Permissible load 20,0 kN            |                                                                                     |                 |        |                |        |
| <b>SS Clamp bulb iron chain</b>     |  | 160x9 - 200x12  | G      | <b>7177002</b> | 2,5    |
| Permissible load 20,0 kN            |                                                                                     | 220x10 - 300x13 | G      | <b>7177001</b> | 2,5    |
|                                     |                                                                                     | 320x11 - 370x16 | G      | <b>7177003</b> | 3,7    |
| <b>SS Clamp bulb iron chain</b>     |  |                 | G      | <b>7177000</b> | 1,6    |
| Designed for bulb flats 160x8 mm    |                                                                                     |                 |        |                |        |
| Permissible load 12,0 kN            |                                                                                     |                 |        |                |        |
| Can be modified for                 |                                                                                     |                 |        |                |        |
| other dimensions                    |                                                                                     |                 |        |                |        |





|                                                                                                                                                           |                                                                                     | Finish          | Item No.                         | Weight     |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------|----------------------------------|------------|
| <b>SS Clamp bulb iron tube</b><br>Designed for bulb flats 160x8 mm<br>Jaw width 22 mm<br>Permissible load 20,0 kN<br>Can be modified for other dimensions |    | G               | <b>7177100</b>                   | 3,0        |
| <b>SS Suspension device chain</b><br>Permissible load 20,0 kN                                                                                             |    | 1362<br>G       | <b>7175001</b>                   | 4,3        |
|                                                                                                                                                           |                                                                                     | 850<br>G        | <b>7175002</b>                   | 3,0        |
| <b>SS Suspension device RA 48 Double 2t</b><br>Hole diameter 20 mm<br>Jaw width 22 mm<br>Permissible load 20,0 kN                                         |   | G               | <b>7175101</b>                   | 2,1        |
| <b>SS Clamp</b><br>Jaw width 30 mm                                                                                                                        |  | 500<br>G        | <b>7215032</b>                   | 5,5        |
| <b>SS Erecting brace</b>                                                                                                                                  |  | G               | <b>7500032</b>                   | 13,0       |
| <b>Scaffold chain with two shackles</b>                                                                                                                   |  | 2 m<br>4 m<br>G | <b>7175005</b><br><b>7175006</b> | 4,7<br>8,9 |




**Supplementary components**

|                                                                                                      |                                                                                     |          | Finish | Item No.       | Weight |
|------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------|--------|----------------|--------|
| <b>Swivel base jack 750</b>                                                                          |    |          | G      | <b>2071005</b> | 5,9    |
| <b>Swivel base jack</b>                                                                              |    | BSLL 200 | G      | <b>7153005</b> | 12,0   |
| <b>Conical base jack</b>                                                                             |    | BPS      | G      | <b>7151002</b> | 9,0    |
| <b>Locking device base</b><br>Keep the bottom screw in place when<br>lifting the scaffolding section |   |          | G      | <b>2071100</b> | 0,2    |
| <b>Open end standard SC</b>                                                                          |  | SC 353   | G      | <b>7011004</b> | 2,0    |
|                                                                                                      |                                                                                     | SC 853   | G      | <b>7011104</b> | 4,8    |
|                                                                                                      |                                                                                     | SC 1353  | G      | <b>7011154</b> | 7,3    |
|                                                                                                      |                                                                                     | SC 1853  | G      | <b>7011204</b> | 9,8    |
| <b>Height adjustment standard</b>                                                                    |  |          | G      | <b>7202001</b> | 6,5    |
| <b>Intermediate transom ITL</b>                                                                      |  | 564      | G      | <b>7204050</b> | 3,6    |
|                                                                                                      |                                                                                     | 700      | G      | <b>7204070</b> | 4,1    |
|                                                                                                      |                                                                                     | 770      | G      | <b>7204071</b> | 4,3    |
|                                                                                                      |                                                                                     | 1010     | G      | <b>7204099</b> | 5,3    |
|                                                                                                      |                                                                                     | 1050     | G      | <b>7204101</b> | 5,5    |
|                                                                                                      |                                                                                     | 1250     | G      | <b>7204122</b> | 6,3    |
|                                                                                                      |                                                                                     | 1655     | G      | <b>7204162</b> | 7,8    |
| <b>Spacer</b>                                                                                        |  | 300      | G      | <b>7022030</b> | 1,5    |
|                                                                                                      |                                                                                     | 350      | G      | <b>7022035</b> | 1,7    |
| <b>Spacer adjustable</b>                                                                             |  | 260-440  | G      | <b>7022026</b> | 2,4    |

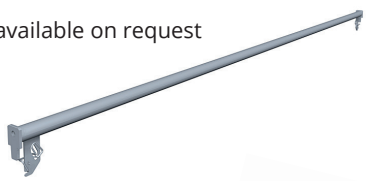

|                                                                                                  |                                                                                     |                                                                      | Finish      | Item No.                                           | Weight            |
|--------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------|-------------|----------------------------------------------------|-------------------|
| <b>Puncheon unit</b><br>For tube diameter 50 mm<br>Can be locked with spring pin 12 mm           |    | 50                                                                   | G           | <b>7208025</b>                                     | 2,3               |
| <b>Puncheon unit In-Line</b><br>For tube diameter 34 mm<br>With locking screw                    |    | S                                                                    | G           | <b>7208018</b>                                     | 3,9               |
| <b>Puncheon unit TB</b><br>For FS                                                                |    |                                                                      | G           | <b>7208000</b>                                     | 5,2               |
| <b>Beam rider</b><br>For tube diameter 50 mm<br>Can be locked with spring pin 12 mm              |  | 50                                                                   | G           | <b>7208024</b>                                     | 1,2               |
| <b>Beam rider BRS</b><br>For tube diameter 34 mm<br>With locking screw                           |  | Pockets at the same level<br>High level pockets<br>Low level pockets | G<br>G<br>G | <b>7208020</b><br><b>7208021</b><br><b>7208022</b> | 2,0<br>2,4<br>2,5 |
| <b>Double rider</b>                                                                              |  | 22                                                                   | G           | <b>7208031</b>                                     | 2,4               |
| <b>Adapter guardrail</b><br>Jaw width 22 mm<br>For guardrail for corner applications for example |  |                                                                      | G           | <b>8792000</b>                                     | 0,6               |
| <b>Locking device guardrail</b><br>Jaw width 22 mm<br>For guardrail, Tube diameter 38 mm         |  |                                                                      | G           | <b>8833000</b>                                     | 0,8               |

|                                                                                                                              |                                                                                     |            | Finish | Item No.       | Weight |
|------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|------------|--------|----------------|--------|
| <b>Guardrail post SRS</b><br>For erection on ledger beam                                                                     |    | 1000       | G      | <b>7015001</b> | 7,3    |
|                                                                                                                              |                                                                                     |            |        |                |        |
| <b>Intermediate standard</b><br>For erection between two<br>ledger beams                                                     |    | 2000       | G      | <b>7015008</b> | 12,5   |
|                                                                                                                              |                                                                                     |            |        |                |        |
| <b>Guardrail post</b><br>Jaw width 22 mm<br>For erection on single ledger                                                    |   | 22         | G      | <b>7015006</b> | 6,1    |
|                                                                                                                              |                                                                                     |            |        |                |        |
| <b>Safety rail</b><br>For erection on<br>ledger beam                                                                         |  |            | G      | <b>7053110</b> | 5,5    |
|                                                                                                                              |                                                                                     |            |        |                |        |
| <b>Cover plate AL</b><br>AL checker plate<br>With handle and hole for lashing<br>For covering of holes<br>when laying planks |  | 995x495x4  | AL     | <b>4011000</b> | 5,6    |
|                                                                                                                              |                                                                                     | 695x495x4  | AL     | <b>4011001</b> | 3,8    |
|                                                                                                                              |                                                                                     | 495x495x4  | AL     | <b>4011002</b> | 2,7    |
|                                                                                                                              |                                                                                     | 1140x630x4 | AL     | <b>4011003</b> | 8,2    |
|                                                                                                                              |                                                                                     | 295x295x4  | AL     | <b>4011006</b> | 0,9    |
|                                                                                                                              |                                                                                     | 395x395x4  | AL     | <b>4011007</b> | 1,7    |
|                                                                                                                              |                                                                                     | 695x295x4  | AL     | <b>4011008</b> | 2,2    |
|                                                                                                                              |                                                                                     | 695x695x4  | AL     | <b>4011009</b> | 5,5    |
|                                                                                                                              |                                                                                     | 1195x595x4 | AL     | <b>4011010</b> | 8,1    |
| <b>Cover plate steel</b>                                                                                                     |  | 190 x 1055 | G      | <b>2153020</b> | 3,4    |
|                                                                                                                              |                                                                                     | 315 x 1055 | G      | <b>2153015</b> | 5,5    |
|                                                                                                                              |                                                                                     | 450 x 1062 | G      | <b>2153010</b> | 7,5    |
| <b>Infill plate AL</b>                                                                                                       |  | 1245 x 227 | AL     | <b>2750411</b> | 2,2    |
|                                                                                                                              |                                                                                     | 1645 x 227 | AL     | <b>2750412</b> | 2,9    |
|                                                                                                                              |                                                                                     | 1945 x 227 | AL     | <b>2750414</b> | 3,4    |
|                                                                                                                              |                                                                                     | 2545 x 227 | AL     | <b>2750413</b> | 4,4    |
|                                                                                                                              |                                                                                     | 3045 x 227 | AL     | <b>2750415</b> | 5,3    |

|                                                                                                                            |                                                                                     |          | Finish | Item No.       | Weight |
|----------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------|--------|----------------|--------|
| <b>Sliding gate adaptor</b><br>For guardrail frame                                                                         |    |          | G      | <b>7053001</b> | 9,4    |
| <b>Fan bracket</b>                                                                                                         |    |          | G      | <b>7214066</b> | 9,5    |
| <b>Transom beam fitting</b>                                                                                                |   | TBJ      | G      | <b>7201000</b> | 1,0    |
| <b>Combination fitting</b>                                                                                                 |  | KJS      | G      | <b>7205001</b> | 2,7    |
|                                                                                                                            |                                                                                     |          | G      | <b>7205010</b> | 2,2    |
| <b>Board to ledger bracket</b>                                                                                             |  | 230-1 bd | G      | <b>7218034</b> | 3,0    |
|                                                                                                                            |                                                                                     | 460-2 bd | G      | <b>7218023</b> | 4,0    |
|                                                                                                                            |                                                                                     | 700-3 bd | G      | <b>7218035</b> | 5,2    |
| <b>Board to board bearer</b>                                                                                               |  | 230-1 bd | G      | <b>7218032</b> | 3,0    |
|                                                                                                                            |                                                                                     | 460-2 bd | G      | <b>7218033</b> | 3,5    |
| <b>Dead leg toeboard</b>                                                                                                   |  |          | G      | <b>7161715</b> | 2,3    |
| <b>Castor wheel</b><br>Ø38 mm<br>Wheel diameter 200 mm<br>Adjustable 275-570 mm<br>Permissible load 10.0 kN, moving 4,0 kN |  | Wicke    | G      | <b>2012005</b> | 7,4    |

|                                                                                                     |                                                                                     |                                           | Finish                | Item No.                                                                               | Weight                               |
|-----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------|-----------------------|----------------------------------------------------------------------------------------|--------------------------------------|
| <b>Outrigger stabilizer</b><br>Adjustable                                                           |    | STB 1000                                  | AL                    | <b>4143101</b>                                                                         | 8,6                                  |
| <b>Support tower</b><br>BV 10 for upside-down base jack<br>and top standard, BVV 175 for Standard S |    | BV 10<br>BVV 175                          | G<br>G                | <b>7155000</b><br><b>7155131</b>                                                       | 3,0<br>3,5                           |
| <b>Tripod</b><br>With pockets on one standard<br>Tube diameter 48 mm                                |    | 500<br>1000<br>1500<br>2000<br>3000       | G<br>G<br>G<br>G<br>G | <b>7203340</b><br><b>7203341</b><br><b>7203344</b><br><b>7203342</b><br><b>7203343</b> | 10,0<br>17,3<br>23,3<br>31,8<br>45,8 |
| <b>Base jack 60</b>                                                                                 |  |                                           | G                     | <b>2071061</b>                                                                         | 15,6                                 |
| <b>Adapter Tripod</b>                                                                               |  | 60<br>48                                  | G<br>G                | <b>7203312</b><br><b>7203311</b>                                                       | 11,6<br>10,0                         |
| <b>Adapter for Adapter Tripod</b>                                                                   |  | 60/48                                     |                       | <b>7203317</b>                                                                         | 3,0                                  |
| <b>Head plate Tripod</b>                                                                            |  | Fork head BVV tripod<br>Head plate Tripod | G<br>G                | <b>7155100</b><br><b>7203309</b>                                                       | 3,0<br>6,3                           |
| <b>Adapter</b><br>Used as an insert in a Ø48 coupler<br>to be able to attach to a Ø34 tube          |  | 35                                        |                       | <b>2041001</b>                                                                         | 0,03                                 |
| <b>Spring pin</b><br>Diameter 12 mm                                                                 |  | 12                                        | G                     | <b>2113100</b>                                                                         | 0,1                                  |
| <b>Locking pin for offshore with chain</b>                                                          |  | 16                                        | G                     | <b>5141257</b>                                                                         | 0,3                                  |
| <b>Spring clip</b>                                                                                  |  | 16                                        | G                     | <b>2116000</b>                                                                         | 0,2                                  |

**Supplementary components**

|                                                                                                                                                                                                                                                                                                      |                                                                  | Finish | Item No.                                           | Weight            |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|--------|----------------------------------------------------|-------------------|
| <b>Single tube beam</b><br>Other lengths available on request                                                                                                                                                                                                                                        | 3050                                                             | G      | <b>8722300</b>                                     | 10,5              |
|                                                                                                                                                                                                                     |                                                                  |        |                                                    |                   |
| <b>Erecting tool</b><br>Advance guardrail tool                                                                                                                                                                                                                                                       |                                                                  | AL     | <b>4052001</b>                                     | 1,4               |
|                                                                                                                                                                                                                     |                                                                  |        |                                                    |                   |
| <b>Telescopic trestle</b><br>Excl. telescopic extension tube                                                                                                                                                                                                                                         | SBT                                                              | G      | <b>7013000</b>                                     | 9,2               |
|                                                                                                                                                                                                                    |                                                                  |        |                                                    |                   |
| <b>Telescopic trestle</b><br>With telescopic extension tube<br>Two scaffolding trestles are combined with a beam to make a trestle                                                                                                                                                                   | SBT                                                              | G      | <b>7013010</b>                                     | 9,2               |
|                                                                                                                                                                                                                    |                                                                  |        |                                                    |                   |
| <b>Telescopic tube for Telescopic trestle</b>                                                                                                                                                                                                                                                        |                                                                  | G      | <b>5111142</b>                                     | 2,5               |
|                                                                                                                                                                                                                   |                                                                  |        |                                                    |                   |
| <b>Hakitainer</b><br>NOTE: Not approved as lifting tackle.<br>Goods must be strapped to the Hakitainer when lifting using a crane.                                                                                                                                                                   | 1100<br>1500                                                     | G<br>G | <b>7181110</b><br><b>7181150</b>                   | 33,6<br>39,4      |
|                                                                                                                                                                                                                   |                                                                  |        |                                                    |                   |
| <b>HAKI Block bracket</b><br>The HAKI Block bracket is combined with a cable wheel or HAKI Secure pulley block.<br>Can also be used as a winch.<br>Coupler with pocket is used when erecting for example 48 mm scaffolding tubes.<br>HAKI Block bracket permissible load 200 kg<br>Cable wheel 70 kg | Gin wheel with ring<br>Bracket coupler 48<br>Block bracket, HAKI |        | <b>5211000</b><br><b>2048017</b><br><b>7173002</b> | 3,6<br>0,9<br>7,9 |
|                                                                                                                                                                                                                   |                                                                  |        |                                                    |                   |

|                                                                                                                                    |                                                                                     | Finish                           | Item No        | Weight |
|------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------------------------|----------------|--------|
| <b>HAKI Offshore Block bracket</b>                                                                                                 |                                                                                     |                                  | <b>7173003</b> | 25,0   |
| Fully certified, complete with<br>Secure pulley block and 30m<br>scaffold rope with thimble<br>and hook.<br>Permissible load 50 kg |    |                                  |                |        |
| <b>HAKI Secure pulley block</b>                                                                                                    |                                                                                     |                                  | <b>2600290</b> | 10,0   |
| Permissible load 50 kg                                                                                                             |    | Rope Ø 18 mm                     | <b>26150AF</b> | 4,5    |
|                                                                                                                                    |                                                                                     | Secure pulley block, HAKI        |                |        |
| <b>Scaffold rope</b>                                                                                                               |                                                                                     | 30m m/thimble and hook           | <b>2610030</b> | 12,1   |
|                                                                                                                                    |                                                                                     | 60m m/thimble and hook           | <b>2610060</b> | 22,1   |
|                                                                                                                                    |                                                                                     | 100m m/thimble and hook          | <b>2610100</b> | 35,1   |
| <b>Scaffold safety sign</b>                                                                                                        |                                                                                     | Sign holder                      | <b>10028</b>   | 0,1    |
| Hooked on standard                                                                                                                 |                                                                                     | Sign                             | <b>10036</b>   | 0,04   |
| Sign holder and sign                                                                                                               |  |                                  |                |        |
| <b>Shackle straight with nut</b>                                                                                                   |                                                                                     | 5,4 tons M16                     | <b>6130251</b> | 0,4    |
|                                                                                                                                    |  |                                  |                |        |
| <b>Tool spring locking catch</b>                                                                                                   |                                                                                     |                                  | <b>1051001</b> | 0,5    |
|                                                                                                                                    |  | Scaffold spanner ratchet 21/22mm | <b>2051022</b> | 0,5    |
|                                                                                                                                    |                                                                                     | Scaffold spanner ratchet 22/23mm | <b>2051023</b> | 0,5    |
| <b>Spring locking catch</b>                                                                                                        |                                                                                     |                                  | <b>6130000</b> | 0,04   |
|                                                                                                                                    |  |                                  |                |        |

**Standards**

|                                    |         | Finish | Item No        | Weight |
|------------------------------------|---------|--------|----------------|--------|
| <b>Standard S4 AL</b>              | S4 500  | AL     | <b>4017056</b> | 1,6    |
| Standard joint with spigot Ø 38 mm | S4 1000 | AL     | <b>4017106</b> | 2,8    |
| Tube diameter 48 mm                | S4 1500 | AL     | <b>4017156</b> | 4,0    |
|                                    | S4 2000 | AL     | <b>4017206</b> | 5,2    |
|                                    | S4 3000 | AL     | <b>4017306</b> | 7,7    |


**Locking pin**

Diameter 16 mm

For reinforcing standard joint in connection with tensile load, e.g. when scaffolding is suspended, when lifting or when scaffolding is used for temporary roof



|                          |     |                |     |
|--------------------------|-----|----------------|-----|
| Spring clip 16           | Fzb | <b>2116000</b> | 0,2 |
| Locking pin for offshore | G   | <b>5141257</b> | 0,3 |

**Standard S4 AL**

Standard joint without spigot

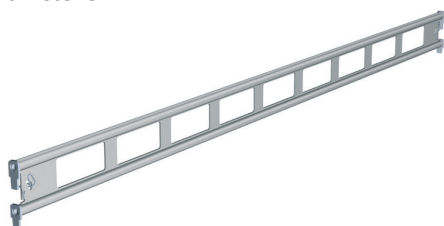
Tube diameter 48 mm



|            |    |                |     |
|------------|----|----------------|-----|
| S4 SC 353  | AL | <b>4011105</b> | 1,0 |
| S4 SC 853  | AL | <b>4011104</b> | 2,2 |
| S4 SC 1353 | AL | <b>4011106</b> | 3,4 |
| S4 SC 1853 | AL | <b>4011107</b> | 4,6 |
| S4 SC 3000 | AL | <b>4011304</b> | 7,7 |

**Beams**

|                           |      | Finish | Item No        | Weight |
|---------------------------|------|--------|----------------|--------|
| <b>Ledger beam</b>        | 350  | AL     | <b>4021031</b> | 1,9    |
| With spring locking catch | 564  | AL     | <b>4021064</b> | 2,2    |
| Tube diameter 34 mm       | 770  | AL     | <b>4021073</b> | 2,9    |
|                           | 1050 | AL     | <b>4021101</b> | 3,5    |
|                           | 1250 | AL     | <b>4021121</b> | 4,2    |
|                           | 1655 | AL     | <b>4021161</b> | 4,8    |
|                           | 1964 | AL     | <b>4021191</b> | 5,8    |
|                           | 2500 | AL     | <b>4021246</b> | 7,2    |
|                           | 3050 | AL     | <b>4021301</b> | 8,5    |


**Single ledger**

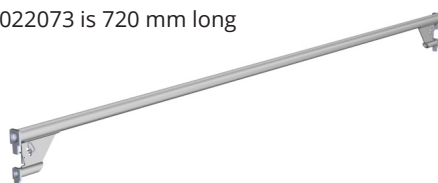
With spring locking catch

Tube diameter 48 mm

Note: 4022066 is 650 mm long

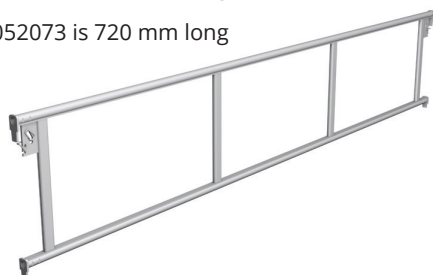
Note: 4022073 is 720 mm long

|      |    |                |     |
|------|----|----------------|-----|
| 564  | AL | <b>4022051</b> | 2,5 |
| 700  | AL | <b>4022066</b> | 2,7 |
| 770  | AL | <b>4022073</b> | 2,9 |
| 1050 | AL | <b>4022101</b> | 3,2 |
| 1250 | AL | <b>4022121</b> | 3,6 |
| 1655 | AL | <b>4022161</b> | 4,1 |
| 1964 | AL | <b>4022191</b> | 4,5 |
| 2500 | AL | <b>4022246</b> | 5,4 |
| 3050 | AL | <b>4022301</b> | 6,2 |

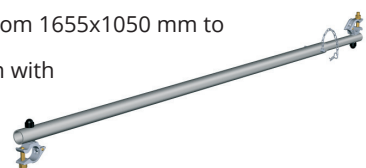


**Guardrails**

|                              |      | Finish | Item No        | Weight |
|------------------------------|------|--------|----------------|--------|
| <b>Guardrail frame</b>       | 564  | AL     | <b>4052051</b> | 2,7    |
| With spring locking catch    | 700  | AL     | <b>4052066</b> | 3,3    |
| Note: 4052066 is 650 mm long | 770  | AL     | <b>4052073</b> | 3,5    |
| Note: 4052073 is 720 mm long | 1050 | AL     | <b>4052101</b> | 4,5    |
|                              | 1250 | AL     | <b>4052121</b> | 4,8    |
|                              | 1655 | AL     | <b>4052161</b> | 5,9    |
|                              | 1964 | AL     | <b>4052191</b> | 6,6    |
|                              | 2500 | AL     | <b>4052246</b> | 7,8    |
|                              | 3050 | AL     | <b>4052301</b> | 8,9    |


**Braces**

|                                                                       |           | Finish | Item No        | Weight |
|-----------------------------------------------------------------------|-----------|--------|----------------|--------|
| <b>Diagonal brace</b>                                                 | 1250      | AL     | <b>4122120</b> | 4,5    |
| Tube diameter 48 mm                                                   | 1655      | AL     | <b>4122160</b> | 4,9    |
|                                                                       | 1964      | AL     | <b>4122190</b> | 5,4    |
|                                                                       | 2500      | AL     | <b>4122245</b> | 6,1    |
|                                                                       | 3050      | AL     | <b>4122300</b> | 6,7    |
| <b>Plan brace HDS</b>                                                 | 3050x1655 | AL     | <b>4141000</b> | 7,0    |
| Tube diameter 48 mm                                                   | 3050x1250 | AL     | <b>4141001</b> | 6,5    |
| HDS 3050x1655 AL L=3468                                               | 2500x1250 | AL     | <b>4141005</b> | 6,0    |
| HDS 3050x1250 AL L=3294                                               | 2500x1655 | AL     | <b>4141006</b> | 6,3    |
| HDS 2500x1250 AL L=2792                                               |           |        |                |        |
| HDS 2500x1655 AL L=2996                                               |           |        |                |        |
| <b>Plan brace telescopic HDS</b>                                      |           | AL     | <b>4141010</b> | 6,3    |
| Tube diameter 38-48 mm                                                |           |        |                |        |
| L=1960-3470 mm                                                        |           |        |                |        |
| For bay sizes from 1655x1050 mm to 3050x1655 mm with 16 fix positions |           |        |                |        |


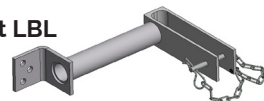

**Brackets**

|                           |        | Finish | Item No        | Weight |
|---------------------------|--------|--------|----------------|--------|
| <b>Bracket</b>            | SK 230 | AL     | <b>4211024</b> | 1,7    |
| Without spigot            | SK 300 | AL     | <b>4211030</b> | 1,1    |
| With spring locking catch | SK 300 | AL     | <b>4211033</b> | 1,8    |
|                           | SK 460 | AL     | <b>4211047</b> | 1,9    |
| <b>Bracket</b>            | SK 564 | AL     | <b>4211052</b> | 3,6    |
| With spigot               | SK 700 | AL     | <b>4211069</b> | 3,8    |
| With spring locking catch | SK 770 | AL     | <b>4211074</b> | 3,9    |



|                           |                                                                                   |          | Finish | Item No        | Weight |
|---------------------------|-----------------------------------------------------------------------------------|----------|--------|----------------|--------|
| <b>Bracket</b>            |                                                                                   | SK 600   | AL     | <b>4211060</b> | 2,6    |
| Without spigot            |  |          |        |                |        |
| With spring locking catch |                                                                                   |          |        |                |        |
| <b>Bracket diagonal</b>   |                                                                                   | 150-5 Bd | AL     | <b>4212002</b> | 7,8    |
|                           |  |          |        |                |        |

### Supplementary components

|                                  |                                                                                     |          | Finish | Item No        | Weight |
|----------------------------------|-------------------------------------------------------------------------------------|----------|--------|----------------|--------|
| <b>Puncheon unit S4 AL</b>       |                                                                                     |          | AL     | <b>4208002</b> | 1,7    |
|                                  |   |          |        |                |        |
| <b>Beam rider with pin</b>       |                                                                                     | BR 34    | AL     | <b>4208021</b> | 1,1    |
|                                  |  |          |        |                |        |
| <b>Locking and run over bar</b>  |                                                                                     | 700x100  | AL     | <b>4024070</b> | 1,1    |
|                                  |                                                                                     | 770x100  | AL     | <b>4024077</b> | 1,3    |
|                                  |                                                                                     | 1050x100 | AL     | <b>4024105</b> | 1,9    |
|                                  |                                                                                     | 1250x100 | AL     | <b>4024125</b> | 2,3    |
|                                  |                                                                                     | 1655x100 | AL     | <b>4024165</b> | 3,1    |
|                                  |                                                                                     | 1964x100 | AL     | <b>4024190</b> | 3,7    |
|                                  |                                                                                     | 2500x100 | AL     | <b>4024250</b> | 4,8    |
|                                  |                                                                                     | 3050x100 | AL     | <b>4024300</b> | 6,0    |
|                                  |  |          |        |                |        |
| <b>Locking device base jack</b>  |                                                                                     |          | AL     | <b>6230800</b> | 0,7    |
|                                  |  |          |        |                |        |
| <b>Board to board bracket</b>    |                                                                                     | 234      | AL     | <b>4218034</b> | 0,8    |
|                                  |                                                                                     | 460      | AL     | <b>4218035</b> | 1,2    |
|                                  |                                                                                     | 700      | AL     | <b>4218036</b> | 1,5    |
|                                  |  |          |        |                |        |
| <b>Beam to board bracket LBL</b> |                                                                                     | 230      | AL     | <b>4218037</b> | 1,2    |
|                                  |                                                                                     | 460      | AL     | <b>4218038</b> | 1,5    |
|                                  |                                                                                     | 700      | AL     | <b>4218039</b> | 1,9    |
|                                  |  |          |        |                |        |

**Base jacks**


|                                   |               | Finish | Item No        | Weight |
|-----------------------------------|---------------|--------|----------------|--------|
| <b>Base jack for S6 standards</b> | BS S6-760/515 | G      | <b>2071032</b> | 6,2    |
| Steel                             |               |        |                |        |
| Ø 34 mm                           |               |        |                |        |
| Adjustable 55-570 mm              |               |        |                |        |


**Standards**

|                                        |            | Finish | Item No        | Weight |
|----------------------------------------|------------|--------|----------------|--------|
| <b>Standard S6 AL with pin</b>         | S6 500     | AL     | <b>4018050</b> | 2,2    |
| Standard joint with spigot, Ø 34 mm    | S6 1000    | AL     | <b>4018100</b> | 3,7    |
| Tube diameter Ø 48 mm                  | S6 1500    | AL     | <b>4018150</b> | 5,3    |
| Incl. pin                              | S6 2000    | AL     | <b>4018200</b> | 6,8    |
|                                        | S6 3000    | AL     | <b>4018300</b> | 9,9    |
|                                        |            |        |                |        |
| <b>Standard S6 AL</b>                  | S6 SC 353  | AL     | <b>4018053</b> | 1,2    |
| Standard joint without spigot, Ø 34 mm | S6 SC 853  | AL     | <b>4018103</b> | 2,8    |
| Tube diameter Ø 48 mm                  | S6 SC 1353 | AL     | <b>4018153</b> | 4,3    |
| Without pin                            | S6 SC 1853 | AL     | <b>4018253</b> | 5,8    |


**Brackets**

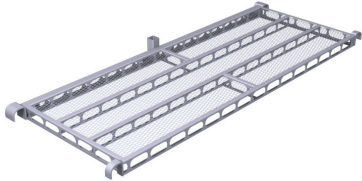
|                                   |             | Finish | Item No        | Weight |
|-----------------------------------|-------------|--------|----------------|--------|
| <b>Bracket S6 AL with pin</b>     | SK 34-564   | AL     | <b>4211054</b> | 3,8    |
| With spigot Ø 34 mm               | SK 34-770   | AL     | <b>4211077</b> | 4,1    |
| Incl. pin                         |             |        |                |        |
|                                   |             |        |                |        |
| <b>Bracket diagonal S6 AL</b>     | SKD S6-1250 | AL     | <b>4212001</b> | 7,6    |
| With spigot Ø 34 mm               |             |        |                |        |
| Tube diameter 48 mm               |             |        |                |        |
| With spring locking catch         |             |        |                |        |
| To be combined with Single Ledger |             |        |                |        |
| 1250 or Ledger Beam 1250          |             |        |                |        |




## Supplementary components

|                                                                                                                                |                                                                                    | Finish   | Item No           | Weight |
|--------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|----------|-------------------|--------|
| <b>Castor wheel S6</b><br>Ø 34 mm<br>Wheel diameter 200 mm<br>Adjustable 275-570 mm<br>Permissible load 10.0 kN, moving 4,0 kN |   | Wicke S6 | <b>2012006</b>    | 7,1    |
| <b>Puncheon 34 S6 with pockets and pin</b><br>With spigot Ø 34 mm                                                              |   | S6       | AL <b>4208003</b> | 2,0    |
| <b>Puncheon 34 S6 without pockets and pin</b><br>With spigot Ø 34 mm                                                           |  |          | AL <b>4208004</b> | 4,2    |

## Stair tower 3050x1655 Symmetric

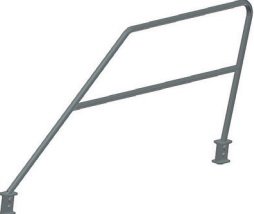
|                                      |                                                                                     |      | Finish | Item No        | Weight |
|--------------------------------------|-------------------------------------------------------------------------------------|------|--------|----------------|--------|
| <b>STS Landing</b>                   |    |      | G      | <b>7095001</b> | 19,3   |
| <b>STS Stair flight</b>              |    | 1000 | G      | <b>7101120</b> | 32,5   |
|                                      |                                                                                     | 1500 | G      | <b>7101151</b> | 28,6   |
|                                      |                                                                                     | 2000 | G      | <b>7101201</b> | 33,9   |
| <b>STS Handrail post</b>             |   |      | G      | <b>7015102</b> | 4,2    |
| Post to be locked with               |                                                                                     |      |        |                |        |
| Locking hook LK 8793000              |                                                                                     |      |        |                |        |
| <b>Guardrail post</b>                |  | 22   | G      | <b>7015006</b> | 6,1    |
| Jaw width 22 mm                      |                                                                                     |      |        |                |        |
| For erection on single tube beam ERB |                                                                                     |      |        |                |        |
| <b>STS Handrail</b>                  |  | 1000 | G      | <b>7058104</b> | 9,4    |
|                                      |                                                                                     | 1500 | G      | <b>7058153</b> | 7,5    |
|                                      |                                                                                     | 2000 | G      | <b>7058203</b> | 8,4    |
| <b>STS Safety gate</b>               |  | SGTS | G      | <b>7053002</b> | 10,9   |
| <b>STS Toeboard</b>                  |  | 873  | G      | <b>2025085</b> | 3,1    |
|                                      |                                                                                     | 1655 | G      | <b>2025159</b> | 4,5    |

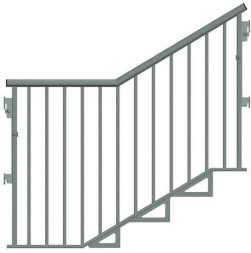
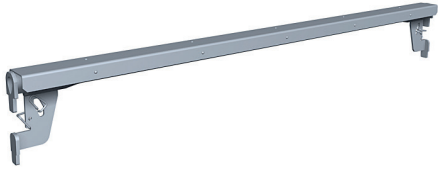
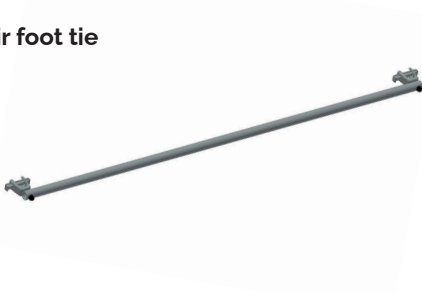
|                     |                                                                                   |          | Finish | Item No        | Weight |
|---------------------|-----------------------------------------------------------------------------------|----------|--------|----------------|--------|
| STS Top Guard frame |  | SGS      | G      | <b>7053003</b> | 7,6    |
| STS Guardrail frame |  | GFL 2357 | G      | <b>7052232</b> | 8,9    |
| STS Entrance step   |  | 1655     | G      | <b>7103160</b> | 14,7   |
| STS Locking hook    |  | LK 10x48 | G      | <b>8793000</b> | 0,1    |


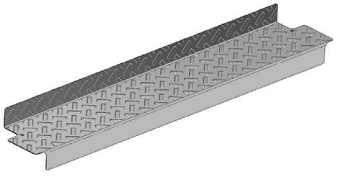
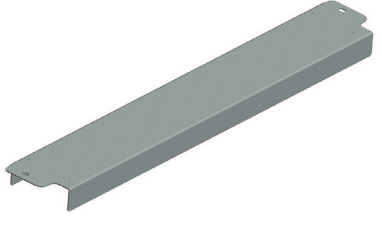
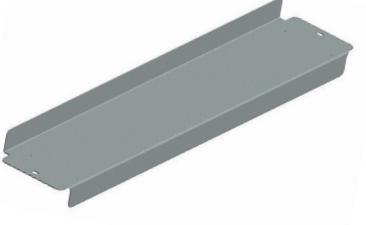
## Stair tower 3050x1655 Traditional

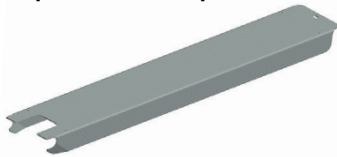
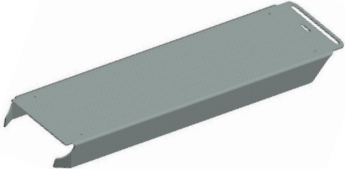
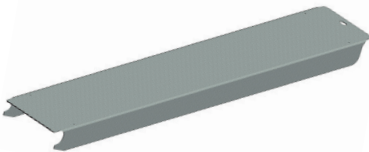
|                   |                                                                                     |      | Finish | Item No        | Weight |
|-------------------|-------------------------------------------------------------------------------------|------|--------|----------------|--------|
| Landing VLP       |  |      | G      | <b>7095000</b> | 26,6   |
| Stair flight TRP  |  | 1000 | G      | <b>7101100</b> | 43,6   |
|                   |                                                                                     | 1500 | G      | <b>7101150</b> | 28,3   |
|                   |                                                                                     | 2000 | G      | <b>7101200</b> | 35,0   |
| SGT Safety gate   |  |      | G      | <b>7053000</b> | 7,6    |
| STS Handrail post |  |      | G      | <b>7015102</b> | 4,2    |

## Public Staircase

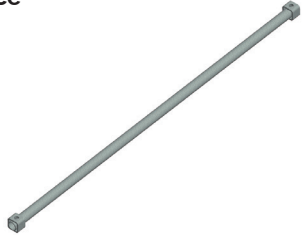
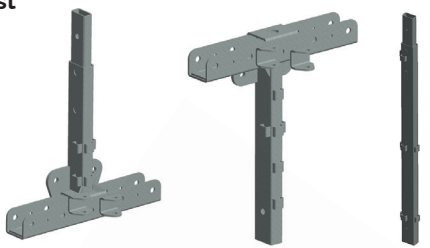
|                                                                                     |                        | Finish | Item No                          | Weight       |
|-------------------------------------------------------------------------------------|------------------------|--------|----------------------------------|--------------|
| STC Entrance transom                                                                | 1250                   | G      | <b>7104120</b>                   | 5,3          |
|    |                        |        |                                  |              |
| STC Entrance step                                                                   | 1250                   | G      | <b>7103120</b>                   | 11,1         |
|    |                        |        |                                  |              |
| STC Toeboard                                                                        | 1250                   |        | <b>2025119</b>                   | 3,5          |
|    |                        |        |                                  |              |
| STC Stair handrail upper                                                            |                        | G      | <b>7058252</b>                   | 6,9          |
|   |                        |        |                                  |              |
| STC Stair handrail                                                                  |                        | G      | <b>7058261</b>                   | 8,6          |
|  |                        |        |                                  |              |
| PAS Stair stringer                                                                  | 1655x1000<br>2500x1500 | G<br>G | <b>7102100</b><br><b>7102150</b> | 25,0<br>34,5 |
|  |                        |        |                                  |              |
| PAS Stair handrail                                                                  | 1655x1000<br>2500x1500 | G<br>G | <b>7058100</b><br><b>7058152</b> | 26,5<br>36,5 |
|  |                        |        |                                  |              |


|                                                                                     |                                                                                     | Finish | Item No        | Weight |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------|----------------|--------|
| <b>PAS Stair handrail</b>                                                           | 1655x500                                                                            | G      | <b>7058050</b> | 24,0   |
| <b>PAS Guardrail</b>                                                                |    |        |                |        |
|                                                                                     | 300                                                                                 | G      | <b>7053030</b> | 7,5    |
|                                                                                     | 564                                                                                 | G      | <b>7053056</b> | 12,1   |
|                                                                                     | 700                                                                                 | G      | <b>7053070</b> | 11,9   |
|                                                                                     | 770                                                                                 | G      | <b>7053077</b> | 12,5   |
|                                                                                     | 1100/770 Tripod                                                                     | G      | <b>7053078</b> | 11,0   |
|                                                                                     | 1100/770 Extended                                                                   | G      | <b>7053079</b> | 18,5   |
|                                                                                     | 1050                                                                                | G      | <b>7053105</b> | 15,7   |
|                                                                                     | 1250                                                                                | G      | <b>7053125</b> | 19,5   |
|                                                                                     | 1655                                                                                | G      | <b>7053165</b> | 23,0   |
| <b>PAS Single tube beam w coverplate</b>                                            | 1964                                                                                | G      | <b>7053191</b> | 28,2   |
|                                                                                     | 2500                                                                                | G      | <b>7053250</b> | 34,2   |
|                                                                                     |    |        |                |        |
|                                                                                     |                                                                                     |        |                |        |
| <b>PAS Stair handrail entrance</b>                                                  | 1250                                                                                | G      | <b>7104125</b> | 6,7    |
|                                                                                     | 1655                                                                                | G      | <b>7104166</b> | 8,5    |
|                                                                                     | 1964                                                                                | G      | <b>7104191</b> | 10,0   |
|  |                                                                                     |        |                |        |
| <b>PAS Stair handrail entrance</b>                                                  | 3-step                                                                              | G      | <b>7058004</b> | 15,0   |
| <b>PAS Stair stringer entrance</b>                                                  | 3-step                                                                              | G      | <b>7102006</b> | 10,7   |
| <b>PAS Stair foot tie</b>                                                           |  |        |                |        |
|                                                                                     | 1655                                                                                | G      | <b>7125166</b> | 8,1    |
|                                                                                     | 2500                                                                                | G      | <b>7125251</b> | 11,5   |
|  |                                                                                     |        |                |        |


|                                                                                                            |                                                                                     |             | Finish | Item No        | Weight |
|------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------|--------|----------------|--------|
| <b>PAS Handrail extension</b><br>Erected with handrail 7058004 and<br>Stair stringer 7102006 on a 1010 bay |    |             |        | <b>7053011</b> | 7,5    |
| <b>PAS Handrail extension</b>                                                                              |    | 3 step to 4 |        | <b>7058002</b> | 7,1    |
| <b>PAS Additional step for stringer</b>                                                                    |   | 3 step      |        | <b>7102007</b> | 3,3    |
| <b>PAS Checker plate entrance tread</b>                                                                    |  | 1250x270    | G      | <b>2140121</b> | 14,5   |
|                                                                                                            |                                                                                     | 1655x270    | G      | <b>2140161</b> | 18,4   |
|                                                                                                            |                                                                                     | 1964x270    | G      | <b>2140191</b> | 21,7   |
| <b>PAS/HBS Checker plate top tread</b>                                                                     |  | 1250x250    | G      | <b>2140122</b> | 14,9   |
|                                                                                                            |                                                                                     | 1655x250    | G      | <b>2140162</b> | 17,3   |
|                                                                                                            |                                                                                     | 1964x250    | G      | <b>2140192</b> | 20,1   |
|                                                                                                            |                                                                                     | 2500x250    | G      | <b>2140252</b> | 25,0   |
| <b>PAS Checker plate tread</b>                                                                             |  | 1250x300    | G      | <b>2140123</b> | 15,0   |
|                                                                                                            |                                                                                     | 1655x300    | G      | <b>2140163</b> | 19,5   |
|                                                                                                            |                                                                                     | 1964x300    | G      | <b>2140193</b> | 23,5   |

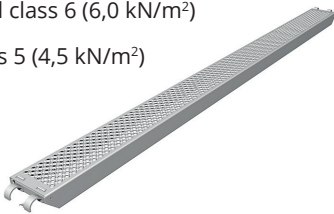
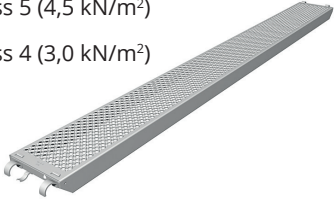
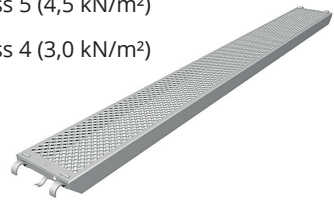
|                                     |                                                                                     | Finish | Item No        | Weight |
|-------------------------------------|-------------------------------------------------------------------------------------|--------|----------------|--------|
| PAS Tripod handrail                 |    | G      | <b>7058000</b> | 7,1    |
| PAS/HBS Chequer plate deck (Tripod) |    | G      | <b>2140167</b> | 19,7   |
| PAS/HBS Checker plate deck          |   | G      | <b>2140125</b> | 13,1   |
|                                     |                                                                                     | G      | <b>2140165</b> | 15,0   |
|                                     |                                                                                     |        | <b>2140195</b> | 17,7   |
| PAS/HBS Checker plate deck          |  | G      | <b>2140126</b> | 14,9   |
|                                     |                                                                                     | G      | <b>2140166</b> | 19,7   |
|                                     |                                                                                     | G      | <b>2140196</b> | 20,1   |

## HBS Heavy Bridge System

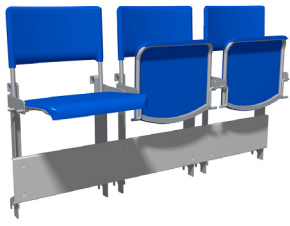
|                                                                                                                                      |           | Finish | Item No        | Weight |
|--------------------------------------------------------------------------------------------------------------------------------------|-----------|--------|----------------|--------|
| <b>HBS Single tube beam with screw lock SBF</b><br> | 1250      | G      | <b>7104124</b> | 5,3    |
|                                                                                                                                      | 1655      | G      | <b>7104164</b> | 6,6    |
|                                                                                                                                      | 1964      | G      | <b>7104194</b> | 7,5    |
|                                                                                                                                      | 2500      | G      | <b>7104254</b> | 9,1    |
| <b>PAS/HBS Checker plate deck</b><br>               | 1250x200  | G      | <b>2140125</b> | 13,1   |
|                                                                                                                                      | 1250x250  | G      | <b>2140126</b> | 14,9   |
|                                                                                                                                      | 2500x200  | G      | <b>2140255</b> | 26,2   |
|                                                                                                                                      | 2500x250  | G      | <b>2140256</b> | 29,8   |
| <b>PAS/HBS Plan brace</b><br>                      | 1250x1250 | G      | <b>7105121</b> | 4,4    |
|                                                                                                                                      | 2500x1250 | G      | <b>7105126</b> | 8,1    |
|                                                                                                                                      | 1250x1655 | G      | <b>7105161</b> | 5,0    |
|                                                                                                                                      | 1250x1964 | G      | <b>7105191</b> | 5,7    |
|                                                                                                                                      | 2500x1655 | G      | <b>7105195</b> | 7,4    |
|                                                                                                                                      | 2500x1964 | G      | <b>7105197</b> | 7,7    |
|                                                                                                                                      | 2500x2500 | G      | <b>7105199</b> | 8,7    |
|                                                                                                                                      | 1250x2500 | G      | <b>7105251</b> | 6,8    |
| <b>HBS Post</b><br>                               | Lower     | G      | <b>7104108</b> | 23,6   |
|                                                                                                                                      | Upper     | G      | <b>7104109</b> | 21,5   |
|                                                                                                                                      | Centre    | G      | <b>7104140</b> | 16,0   |
| <b>HBS Sway brace</b><br>                         | 4000      | G      | <b>7104141</b> | 16,3   |
| <b>HBS Diagonal brace</b><br>                     | 1250      | G      | <b>7104138</b> | 14,8   |
|                                                                                                                                      | 2500      | G      | <b>7104119</b> | 17,0   |

|                    |                                                                                     |          | Finish | Item No        | Weight |
|--------------------|-------------------------------------------------------------------------------------|----------|--------|----------------|--------|
| HBS Upper boom     |    | 1250     | G      | <b>7104135</b> | 10,9   |
|                    |                                                                                     | 2500     | G      | <b>7104118</b> | 23,2   |
| HBS Lower boom     |    | 1250     | G      | <b>7104136</b> | 12,5   |
|                    |                                                                                     | 2500     | G      | <b>7104130</b> | 26,8   |
| HBS Cladding panel |    | 250x1250 |        | <b>2033120</b> | 2,0    |
|                    |                                                                                     | 250x2500 |        | <b>2033250</b> | 4,0    |
| HBS U-Track unit   |  | Left     | G      | <b>7104129</b> | 3,5    |
|                    |                                                                                     | Right    | G      | <b>7104131</b> | 3,5    |
| HBS H-Track unit   |  |          | G      | <b>7104132</b> | 7,0    |
| HBS Track clamp    |  |          | G      | <b>7104133</b> | 0,5    |

|                                             |                                                                                   | Finish | Item No        | Weight |
|---------------------------------------------|-----------------------------------------------------------------------------------|--------|----------------|--------|
| <b>HBS Tripod head adapter incl. Clamps</b> |  | G      | <b>7104111</b> | 27,5   |
| <b>HBS Clevis pin</b>                       |  |        |                |        |
|                                             | 20 L=125                                                                          |        | <b>2113010</b> | 0,3    |
|                                             | Washer SRB 21x36x3                                                                | G      | <b>6130296</b> | 0,02   |
|                                             | HBS R-Pin A-E4                                                                    | Fzb    | <b>6130203</b> | 0,02   |
|                                             | 16 L=90                                                                           |        | <b>2113011</b> | 0,2    |
|                                             | Washer SRB 17,5x34x3                                                              | G      | <b>6130216</b> | 0,01   |
|                                             | HBS R-Pin A-E4                                                                    | Fzb    | <b>6130203</b> | 0,02   |
|                                             | 20 L=70                                                                           |        | <b>2113012</b> | 0,2    |
|                                             | Washer SRB 21x36x3                                                                | G      | <b>6130296</b> | 0,02   |
|                                             | HBS R-Pin A-E4                                                                    | Fzb    | <b>6130203</b> | 0,02   |

| PAS/HBS Decking                        |                                                                                     |             | Finish | Item No        | Weight |
|----------------------------------------|-------------------------------------------------------------------------------------|-------------|--------|----------------|--------|
| <b>AL plank B=200 mm</b>               |                                                                                     | 770x200x90  | AL     | <b>2153079</b> | 3,6    |
| With locking in each end               |                                                                                     | 1050x200x90 | AL     | <b>2153105</b> | 4,5    |
| L=770-2500 - Load class 6 (6,0 kN/m²)  |                                                                                     | 1250x200x90 | AL     | <b>2153125</b> | 5,0    |
| L=3050 - Load class 5 (4,5 kN/m²)      |  | 1655x200x90 | AL     | <b>2153165</b> | 6,2    |
|                                        |                                                                                     | 1964x200x90 | AL     | <b>2153195</b> | 7,1    |
|                                        |                                                                                     | 2500x200x90 | AL     | <b>2153255</b> | 8,7    |
|                                        |                                                                                     | 3050x200x90 | AL     | <b>2153305</b> | 10,3   |
| <b>AL plank B=295 mm</b>               |                                                                                     | 564x295x90  | AL     | <b>2153054</b> | 3,9    |
| With locking in each end               |                                                                                     | 770x295x90  | AL     | <b>2153078</b> | 4,4    |
| L=770-1964 - Load class 6 (6,0 kN/m²)  |                                                                                     | 1050x295x90 | AL     | <b>2153104</b> | 5,4    |
| L=2500 - Load class 5 (4,5 kN/m²)      |                                                                                     | 1250x295x90 | AL     | <b>2153124</b> | 6,1    |
| L=3050 - Load class 4 (3,0 kN/m²)      |  | 1655x295x90 | AL     | <b>2153164</b> | 7,5    |
|                                        |                                                                                     | 1964x295x90 | AL     | <b>2153194</b> | 8,6    |
|                                        |                                                                                     | 2500x295x90 | AL     | <b>2153254</b> | 10,5   |
|                                        |                                                                                     | 3050x295x90 | AL     | <b>2153304</b> | 12,4   |
| <b>AL plank B=320 mm</b>               |                                                                                     | 770x320x90  | AL     | <b>2153077</b> | 4,7    |
| L=1250-1964 - Load class 6 (6,0 kN/m²) |                                                                                     | 1050x320x90 | AL     | <b>2153103</b> | 5,7    |
| L=2500 - Load class 5 (4,5 kN/m²)      |                                                                                     | 1250x320x90 | AL     | <b>2153123</b> | 6,4    |
| L=3050 - Load class 4 (3,0 kN/m²)      |  | 1655x320x90 | AL     | <b>2153163</b> | 7,9    |
|                                        |                                                                                     | 1964x320x90 | AL     | <b>2153193</b> | 9,1    |
|                                        |                                                                                     | 2500x320x90 | AL     | <b>2153253</b> | 11,0   |
|                                        |                                                                                     | 3050x320x90 | AL     | <b>2153303</b> | 13,1   |

## Grandstand


|                                                  |                                                                                    |                        | Finish | Item No        | Weight |
|--------------------------------------------------|------------------------------------------------------------------------------------|------------------------|--------|----------------|--------|
| <b>Seating</b>                                   |   | Seating grandstand 1   |        | <b>2022111</b> | 9,7    |
|                                                  |                                                                                    | Seating grandstand 2   |        | <b>2022112</b> | 19,5   |
|                                                  |                                                                                    | Seating grandstand 3   |        | <b>2022113</b> | 29,0   |
|                                                  |                                                                                    | Brace seating 1050     | G      | <b>7104100</b> | 4,5    |
|                                                  |                                                                                    | Locking device seating | G      | <b>7161510</b> | 0,9    |
| <b>Bracket grandstand</b>                        |   |                        | G      | <b>7211002</b> | 3,4    |
| For erection on single tube beam ERB<br>W=460 mm |                                                                                    |                        |        |                |        |
| <b>Riser</b>                                     |   | 1655                   | G      | <b>2028160</b> | 9,2    |
| Used as a safety device in stairs                |                                                                                    |                        |        |                |        |
| <b>Side guardrail grandstand</b>                 |  | 1050                   | G      | <b>7053100</b> | 15,2   |
| Handrail and gate adapted to stairs              |                                                                                    |                        |        |                |        |

## Sign tower

|                                                                                |                                                                                     |                       | Finish | Item No        | Weight |
|--------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------|--------|----------------|--------|
| <b>Counterweight</b>                                                           |  | Counterweight 1500 kg |        | <b>2121000</b> | 1500   |
|                                                                                |                                                                                     | Washer SRB 21x36x3    | G      | <b>6130296</b> | 0,02   |
|                                                                                |                                                                                     | Bolt M20x140          | G      | <b>6130350</b> | 0,4    |
|                                                                                |                                                                                     | Square tube 50x50-650 | G      | <b>7156000</b> | 4,2    |
| <b>Swivel base jack</b>                                                        |  | BSLL 1200             | G      | <b>7153007</b> | 19,4   |
| Swivel base tube L=1200 mm Ø 60 mm<br>Adjustable 176-711 mm<br>Jaw width 22 mm |                                                                                     |                       |        |                |        |
| <b>Group of lugs</b>                                                           |  | 4x60                  | G      | <b>7206000</b> | 2,6    |
| 4x60°                                                                          |                                                                                     |                       |        |                |        |
| <b>Right angle coupler</b>                                                     |  | KF 34x48 30           | G      | <b>7164000</b> | 1,1    |
| Angled 30°<br>Jaw width 22 mm                                                  |                                                                                     |                       |        |                |        |


|                       | Finish | Item No        | Weight |
|-----------------------|--------|----------------|--------|
| <b>Signboard clip</b> | G      | <b>2111000</b> | 0,4    |

For flanged sheet metal sign



|                      |   |                |     |
|----------------------|---|----------------|-----|
| <b>Light bracket</b> | G | <b>7213000</b> | 2,0 |
|----------------------|---|----------------|-----|

Jaw width 22 mm



## Edge protection

|                                       | Finish | Item No         | Weight |
|---------------------------------------|--------|-----------------|--------|
| <b>Edge protection barrier MK2 80</b> |        | <b>V124-001</b> | 18,3   |

Blue



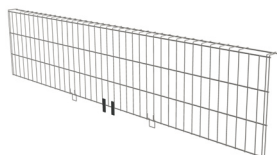
|                                     |      |   |                |     |
|-------------------------------------|------|---|----------------|-----|
| <b>Post for barrier in scaffold</b> | 1150 | G | <b>7015020</b> | 4,1 |
|-------------------------------------|------|---|----------------|-----|



|                       |     |   |                |     |
|-----------------------|-----|---|----------------|-----|
| <b>Post extension</b> | 800 | G | <b>7015021</b> | 1,8 |
|-----------------------|-----|---|----------------|-----|



|                                            |          |  |                 |     |
|--------------------------------------------|----------|--|-----------------|-----|
| <b>Edge protection make up barrier MK2</b> | 2600x575 |  | <b>V124-050</b> | 8,4 |
|--------------------------------------------|----------|--|-----------------|-----|



|                   |  |   |                 |     |
|-------------------|--|---|-----------------|-----|
| <b>Slider MK2</b> |  | G | <b>V122-017</b> | 0,2 |
|-------------------|--|---|-----------------|-----|

For locking the Post extension

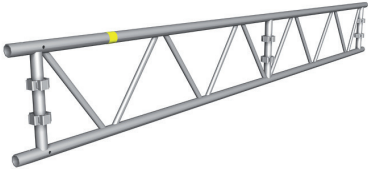
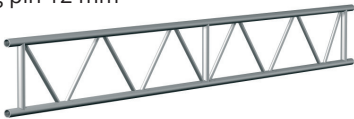
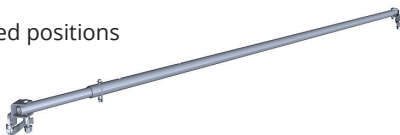


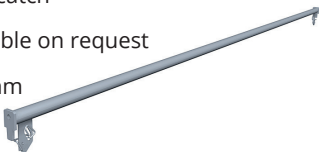
|                      |  |   |                 |      |
|----------------------|--|---|-----------------|------|
| <b>Barrier frame</b> |  | G | <b>V125-001</b> | 73,0 |
|----------------------|--|---|-----------------|------|

80 barrier panels



### 450 Components

|                                                                                     |                                  | Finish | Item No        | Weight |
|-------------------------------------------------------------------------------------|----------------------------------|--------|----------------|--------|
| <b>450 Lattice beam w. pockets</b>                                                  | 2220                             | AL     | <b>4032211</b> | 9,9    |
| With pockets on verticals and holes for                                             | 4100                             | AL     | <b>4032411</b> | 17,8   |
| track clamp saddles. The beam is connected with                                     | 6100                             | AL     | <b>4032611</b> | 25,8   |
| 2 psc 7203000 and 8 psc spring pin 12 mm                                            | 8100                             | AL     | <b>4032811</b> | 34,0   |
|    |                                  |        |                |        |
| <b>450 Lattice beam</b>                                                             | 4100                             | AL     | <b>4032410</b> | 16,7   |
| The beam is connected with 2 psc 7203000                                            | 6100                             | AL     | <b>4032610</b> | 24,3   |
| and 8 psc spring pin 12 mm                                                          | 8100                             | AL     | <b>4032810</b> | 32,2   |
|    |                                  |        |                |        |
| <b>450 Ridge connector</b>                                                          | Ridge connector 22,5 lower       | G      | <b>7201316</b> | 2,6    |
| Each connector tube shall be fitted                                                 | Ridge connector straight         | G      | <b>7203000</b> | 2,0    |
| with 4 pcs spring pin 12 mm                                                         | Ridge connector 30 lower         | G      | <b>7203003</b> | 2,8    |
|   |                                  |        |                |        |
|                                                                                     | Ridge connector 30 upper         | G      | <b>7203004</b> | 5,7    |
|                                                                                     | Ridge connector 15 lower         | G      | <b>7203005</b> | 2,3    |
|                                                                                     | Ridge connector 15 upper         | G      | <b>7203008</b> | 4,0    |
|                                                                                     | Ridge connector 22,5 upper       | G      | <b>7203013</b> | 4,2    |
| <b>Ridge connector eaves 450</b>                                                    | Ridge connector eaves 15 inner   | G      | <b>7201313</b> | 2,6    |
| Ridge connectors shall be fitted                                                    | Ridge connector eaves 22,5 inner | G      | <b>7201315</b> | 2,9    |
| with spring pin 12 mm                                                               | Ridge connector eaves 15 outer   | G      | <b>7203012</b> | 5,1    |
|  |                                  |        |                |        |
|                                                                                     | Ridge connector eaves 22,5 outer | G      | <b>7203014</b> | 3,9    |
| <b>Adapter lattice beam</b>                                                         |                                  | G      | <b>7203338</b> | 5,8    |
|  |                                  |        |                |        |
| <b>Plan brace 450 telescopic</b>                                                    |                                  | AL     | <b>4141020</b> | 8,1    |
| With pocket fasteners                                                               |                                  |        |                |        |
| For AL 450 Lattice beams w. pockets                                                 |                                  |        |                |        |
| For bay sizes 3050x1960 mm,                                                         |                                  |        |                |        |
| 3050x1920 mm as well 3050x1880 mm                                                   |                                  |        |                |        |
| with three fixed positions                                                          |                                  |        |                |        |
|  |                                  |        |                |        |


|                                                                                                                                                             |                                                                                     | Finish | Item No        | Weight |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------|----------------|--------|
| <b>Single tube beam</b><br>With spring locking catch<br>Other lengths available on request<br>Tube diameter 42 mm                                           |    | G      | <b>8722300</b> | 10,5   |
| <b>450 Eaves rail adaptor</b>                                                                                                                               |    | G      | <b>7014000</b> | 3,8    |
| <b>Reinforcement detail</b>                                                                                                                                 |    | G      | <b>7142000</b> | 10,1   |
| <b>Wheel</b>                                                                                                                                                |  | G      | <b>7142001</b> | 14,5   |
| <b>Locking device wheel</b>                                                                                                                                 |  | G      | <b>7165002</b> | 5,3    |
| <b>450 Rolling track device LB</b><br>Jaw width 22 mm<br>For erection of framework beam 450 AL<br>as track for roof<br>Erected on double longitudinal beams |  | G      | <b>7175003</b> | 5,6    |
| <b>450 Shelter leg</b>                                                                                                                                      |  | G      | <b>7014010</b> | 12,7   |

|                                                                                   |      | Finish | Item No        | Weight |
|-----------------------------------------------------------------------------------|------|--------|----------------|--------|
| <b>450 Straight track</b>                                                         | 2000 | AL     | <b>7541200</b> | 4,2    |
| L=2000 and 3360 mm                                                                | 3360 | AL     | <b>7541336</b> | 7,2    |
| With 7540001 Track joiner AL                                                      |      |        |                |        |
| erected in upper end                                                              |      |        |                |        |
| Marked with art. No. in upper end                                                 |      |        |                |        |
|  |      |        |                |        |
| <b>450 Track clamp eaves</b>                                                      |      | Fzb    | <b>7541004</b> | 1,0    |
| Erected with one 2113100                                                          |      |        |                |        |
| 12 mm Spring pin                                                                  |      |        |                |        |
|  |      |        |                |        |
| <b>450 Ridge roller</b>                                                           | 3050 | G      | <b>7500030</b> | 15,5   |
|  |      |        |                |        |

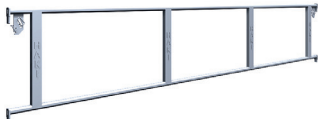
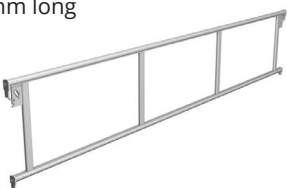
**Base jacks**

|                                                                                                                            | Finish | Item No        | Weight |
|----------------------------------------------------------------------------------------------------------------------------|--------|----------------|--------|
| <b>Base jack</b><br>Adjustable 55-570 mm  | G      | <b>2071000</b> | 5,0    |

**Frames**

|                                                                                                                            | Finish | Item No                          | Weight     |
|----------------------------------------------------------------------------------------------------------------------------|--------|----------------------------------|------------|
| <b>Frame 2000</b><br> RA 2000             | G      | <b>8731204</b>                   | 17,1       |
| <b>Frame 2000 AL</b><br> RA 2000          | AL     | <b>4731201</b>                   | 8,9        |
| <b>Frame 1000</b><br> RA 1000            | G      | <b>8731104</b>                   | 12,4       |
| <b>Frame 1000 AL</b><br> RA 1000         | AL     | <b>4731101</b>                   | 6,4        |
| <b>Frame 800</b><br> RA 800             | G      | <b>8731084</b>                   | 10,0       |
| <b>Frame 800 AL</b><br> RA 800          | AL     | <b>4731081</b>                   | 5,1        |
| <b>Frame 500</b><br> RA 500             | G      | <b>8731053</b>                   | 7,0        |
| <b>Frame 500 AL</b><br> RA 500          | AL     | <b>4731051</b>                   | 3,8        |
| <b>Frame with Toeboard</b><br> RAF 1000 | G      | <b>8731105</b>                   | 14,5       |
| <b>Frame with Toeboard</b><br> RAF 1000 | AL     | <b>4731105</b>                   | 7,7        |
| <b>L-frame</b><br> RAL 1000<br>RAL 2000 | G<br>G | <b>8734100</b><br><b>8734200</b> | 6,1<br>9,8 |
| <b>Bolt w/chain for L-Frame</b><br>     | G      | <b>5144054</b>                   | 0,15       |

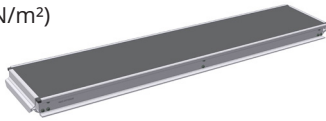
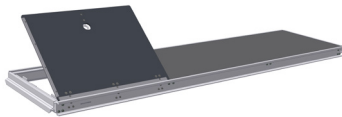
**Guardrails**

|                                                                                     |                                                                                    | Finish | Item No        | Weight |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|--------|----------------|--------|
| <b>Guardrail frame GFL</b>                                                          | 700                                                                                | G      | <b>7052070</b> | 3,8    |
| With spring locking catch                                                           | 1250                                                                               | G      | <b>7052124</b> | 5,7    |
| Tube octagon 28 mm                                                                  | 1655                                                                               | G      | <b>7052164</b> | 7,4    |
| Note! 7052070 is 650 mm long                                                        | 1964                                                                               | G      | <b>7052194</b> | 8,1    |
|    | 2500                                                                               | G      | <b>7052254</b> | 9,2    |
|                                                                                     | 3050                                                                               | G      | <b>7052304</b> | 10,5   |
| <b>Guardrail frame AL</b>                                                           | SKRD 700                                                                           | AL     | <b>4052066</b> | 3,3    |
| With spring locking catch                                                           | SKRD 1250                                                                          | AL     | <b>4052121</b> | 4,8    |
| Note! 4052066 is 650 mm long                                                        | SKRD 1655                                                                          | AL     | <b>4052161</b> | 5,9    |
|    | SKRD 1964                                                                          | AL     | <b>4052191</b> | 6,6    |
|                                                                                     | SKRD 2500                                                                          | AL     | <b>4052246</b> | 7,8    |
|                                                                                     | SKRD 3050                                                                          | AL     | <b>4052301</b> | 8,9    |
| <b>Guardrail frame</b>                                                              | SKRDF 700                                                                          | G      | <b>8753000</b> | 7,5    |
| With spring locking catch                                                           |  |        |                |        |
| <b>Guardrail frame SKRA</b>                                                         | SKRA 500-700                                                                       | G      | <b>8751075</b> | 4,4    |
|  |                                                                                    |        |                |        |


**Tying-in**

|                                                                                     |             | Finish | Item No        | Weight |
|-------------------------------------------------------------------------------------|-------------|--------|----------------|--------|
| <b>Tie rod tube</b>                                                                 | SVF 450x48  | G      | <b>8832046</b> | 2,2    |
| Tube diameter 16 mm                                                                 | SVF 600x48  | G      | <b>8832061</b> | 2,6    |
| Permissible load 9,0 kN                                                             | SVF 900x48  | G      | <b>8832091</b> | 3,7    |
| Erected with right angle coupler 48x48                                              | SVF 1200x48 | G      | <b>8832121</b> | 4,8    |
|  |             |        |                |        |

**Decking**

|                                                                                     |               | Finish | Item No        | Weight |
|-------------------------------------------------------------------------------------|---------------|--------|----------------|--------|
| <b>Decking unit Frame B=620 mm</b>                                                  | PL 700x620    | AL     | <b>4081077</b> | 6,0    |
| With aluminum frame and composite board                                             | PL 1250x620   | AL     | <b>4081127</b> | 9,5    |
| Load class 3 (2,0 kN/m <sup>2</sup> )                                               | PL 1655x620   | AL     | <b>4081167</b> | 11,6   |
|    | PL 1964x620   | AL     | <b>4081197</b> | 13,1   |
|                                                                                     | PL 2500x620   | AL     | <b>4081257</b> | 16,6   |
|                                                                                     | PL 3050x620   | AL     | <b>4081307</b> | 18,9   |
| <b>Decking unit Frame B=310 mm</b>                                                  | PL 1655x310   | AL     | <b>4082167</b> | 7,7    |
| With aluminum frame and composite board                                             | PL 1964x310   | AL     | <b>4082197</b> | 8,9    |
| Load class 3 (2,0 kN/m <sup>2</sup> )                                               | PL 2500x310   | AL     | <b>4082247</b> | 11,3   |
|    | PL 3050x310   | AL     | <b>4082307</b> | 13,4   |
| <b>Decking unit Frame hatch</b>                                                     | PLLU 1964x620 | AL     | <b>4081192</b> | 14,8   |
| With aluminum frame and composite board                                             | PLLU 2500x620 | AL     | <b>4081242</b> | 17,4   |
| Load class 3 (2,0 kN/m <sup>2</sup> )                                               | PLLU 3050x620 | AL     | <b>4081303</b> | 20,2   |
|   |               |        |                |        |
| <b>Composite board</b>                                                              | 2988x612x9    |        | <b>6120373</b> | 7,3    |
|  |               |        |                |        |
| <b>Ladder</b>                                                                       | 2100          | AL     | <b>2091210</b> | 3,4    |
|  |               |        |                |        |

**Toeboards**

|                            |                                                                                     | Finish | Item No        | Weight |
|----------------------------|-------------------------------------------------------------------------------------|--------|----------------|--------|
| <b>Toeboard</b>            | Yellow w. logo FL 3300x150x32                                                       |        | <b>2025331</b> | 5,6    |
| Wood, yellow glazing paint |  |        |                |        |
| <b>Toeboard clip</b>       |                                                                                     |        | <b>1162002</b> | 0,4    |
| With nut 19 mm             |  |        |                |        |
| <b>Toeboard clip</b>       |                                                                                     |        |                |        |
| Plastic                    |  |        | <b>2131001</b> | 0,2    |
| Steel                      |  |        | <b>7161012</b> | 0,7    |
|                            | LFP 150x32                                                                          |        |                |        |
|                            | LF 70 Short                                                                         |        |                |        |

**Brackets**

|                                                                                   |                                                                                   | Finish | Item No        | Weight |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--------|----------------|--------|
| <b>Bracket</b>                                                                    | SK 300                                                                            | G      | <b>8775030</b> | 3,9    |
| Jaw width 22 mm                                                                   | SK 700                                                                            | G      | <b>8775070</b> | 7,9    |
|  | SK 800                                                                            | G      | <b>8775080</b> | 9,1    |
| <b>Bracket AL</b>                                                                 | SK 700 22 mm                                                                      | AL     | <b>4211072</b> | 3,5    |
| Bracket SK 700 with and                                                           |                                                                                   |        |                |        |
| Bracket SK 650 without spigot                                                     |  |        |                |        |
| Jaw width 22 mm                                                                   |                                                                                   |        |                |        |

**Stairs**

|                                                                                     |                              | Finish | Item No        | Weight |
|-------------------------------------------------------------------------------------|------------------------------|--------|----------------|--------|
| <b>UTV Stair AL</b>                                                                 | Spring pin 12 mm             |        | <b>2113100</b> | 0,1    |
| With platform and locking                                                           | Stair handrail HL 2500x2000  | AL     | <b>4058245</b> | 9,2    |
| LxH 3050x2000 mm alt. 2500x2000 mm                                                  | Stair handrail HL 3050x2000  | AL     | <b>4058300</b> | 10,3   |
| Width 600 mm                                                                        | Stair UTV 1000               | AL     | <b>4102105</b> | 11,2   |
|   | Stair UTV 2500x2000          | AL     | <b>4102247</b> | 22,9   |
|                                                                                     | Stair UTV 3050x2000          | AL     | <b>4102302</b> | 29,2   |
|                                                                                     | STS Handrail post 1000       | G      | <b>7015102</b> | 4,2    |
|                                                                                     | Bracket Handrail post UTV AL | G      | <b>7058300</b> | 1,5    |
| <b>UTV Stair</b>                                                                    | Stair UTV 3050x2000          | G      | <b>2092200</b> | 39,7   |
| With platform and locking                                                           | Spring pin 12 mm             |        | <b>2113100</b> | 0,1    |
| LxH 3050x2000 mm                                                                    | Gelender HL 3050x2000        | G      | <b>2161300</b> | 19,3   |
| Width 600 mm                                                                        | STS Handrail post 1000       | G      | <b>7015102</b> | 4,2    |
|  | Bracket Handrail post UTV    | G      | <b>8752001</b> | 2,5    |

**Landing link panel UTV AL/Frame**

For covering the hole between  
platform and frame



**7211044** 3,6

**Scaffold trailer**

Scaffold trailer for Frame

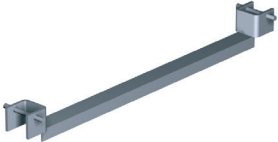
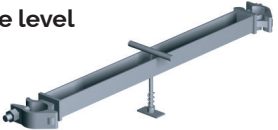

Total weight 1300 kg

Payload 983 kg

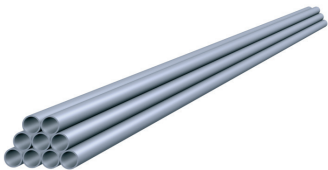


**6265H00** 310,00

**Supplementary components**

|                                                                                                |                                                                                     | Finish | Item No        | Weight |
|------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------|----------------|--------|
| <b>Transom ground level</b>                                                                    | ULB 700                                                                             | G      | <b>8743700</b> | 2,4    |
|               |                                                                                     |        |                |        |
| <b>Platform locking</b>                                                                        | LSB 700                                                                             | G      | <b>8744701</b> | 2,3    |
|               |                                                                                     |        |                |        |
|                                                                                                | LSB 0,7                                                                             | G      | <b>8744700</b> | 2,3    |
| <b>Transom intermediate level</b>                                                              | TP 700                                                                              | G      | <b>8743701</b> | 3,7    |
| Jaw width 22 mm                                                                                |    |        |                |        |
| <b>Adapter guardrail</b>                                                                       |                                                                                     | G      | <b>8792000</b> | 0,6    |
| For guardrail for corner applications for example                                              |   |        |                |        |
| Jaw width 22 mm                                                                                |                                                                                     |        |                |        |
| <b>Locking device guardrail</b>                                                                |                                                                                     | G      | <b>8833000</b> | 0,8    |
| For guardrail,, Tube diameter 38 mm                                                            |  |        |                |        |
| Jaw width 22 mm                                                                                |                                                                                     |        |                |        |
| <b>Locking hook</b>                                                                            |                                                                                     | G      | <b>8793000</b> | 0,1    |
| For locking standard joint at tension load, e.g. lifting or scaffolding for weather protection |  |        |                |        |
| Not for suspended scaffolding                                                                  |                                                                                     |        |                |        |
| <b>Pavement frame</b>                                                                          |                                                                                     | G      | <b>8732201</b> | 39,5   |
| With two fixed and two adjustable spigots                                                      |  |        |                |        |
| Bay width 1460 mm                                                                              |                                                                                     |        |                |        |
| <b>Ramtainer</b>                                                                               |                                                                                     | G      | <b>8871000</b> | 28,9   |
| For twenty vertical frames                                                                     |  |        |                |        |
| The frames are lashed to the ramtainer with strapping                                          |                                                                                     |        |                |        |

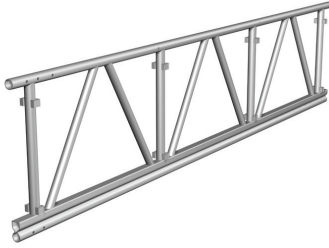


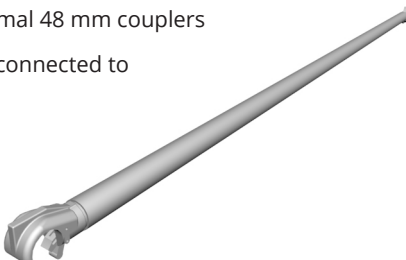
**Scaffold tubes**


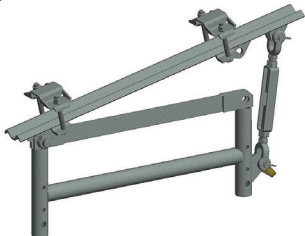

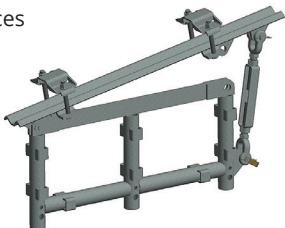
|                         |                                                                                   | Finish | Item No        | Weight |
|-------------------------|-----------------------------------------------------------------------------------|--------|----------------|--------|
| <b>Scaffold tube</b>    |  | G      | <b>7241100</b> | 4,1    |
|                         |                                                                                   | G      | <b>7241150</b> | 6,1    |
|                         |                                                                                   | G      | <b>7241200</b> | 8,0    |
|                         |                                                                                   | G      | <b>7241250</b> | 10,3   |
|                         |                                                                                   | G      | <b>7241300</b> | 12,4   |
|                         |                                                                                   | G      | <b>7241350</b> | 14,1   |
|                         |                                                                                   | G      | <b>7241400</b> | 16,7   |
|                         |                                                                                   | G      | <b>7241450</b> | 18,0   |
|                         |                                                                                   | G      | <b>7241500</b> | 20,1   |
|                         |                                                                                   | G      | <b>7241600</b> | 24,1   |
| <b>Scaffold tube AL</b> |                                                                                   | AL     | <b>4241050</b> | 0,8    |
|                         |                                                                                   | AL     | <b>4241100</b> | 1,5    |
|                         |                                                                                   | AL     | <b>4241150</b> | 2,3    |
|                         |                                                                                   | AL     | <b>4241200</b> | 3,0    |
|                         |                                                                                   | AL     | <b>4241300</b> | 4,5    |
|                         |                                                                                   | AL     | <b>4241400</b> | 6,0    |
|                         |                                                                                   | AL     | <b>4241600</b> | 9,0    |

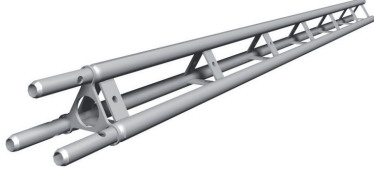
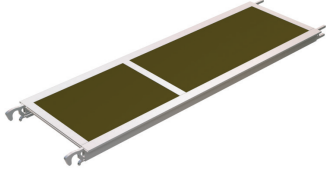
**Couplers**

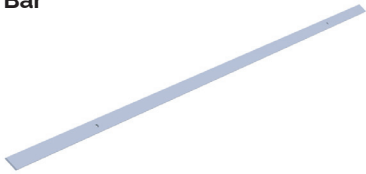
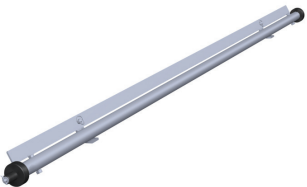
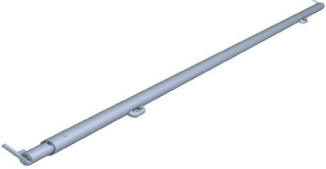
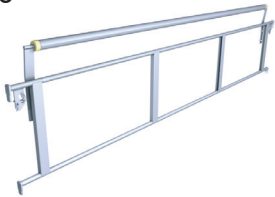
|                                                      |                                                                                     | Finish | Item No        | Weight |
|------------------------------------------------------|-------------------------------------------------------------------------------------|--------|----------------|--------|
| <b>Right angle coupler</b><br>Jaw width 22 mm        |  | G      | <b>2048010</b> | 1,2    |
|                                                      |                                                                                     |        |                |        |
| <b>Swivel coupler</b><br>Jaw width 22 mm             |  | G      | <b>2048011</b> | 1,4    |
|                                                      |                                                                                     |        |                |        |
| <b>Supplementary couplers</b>                        |  | G      | <b>2042000</b> | 1,7    |
|                                                      |                                                                                     | G      | <b>2042001</b> | 1,9    |
|                                                      |                                                                                     | G      | <b>2044000</b> | 1,3    |
|                                                      |                                                                                     | G      | <b>2045001</b> | 1,3    |
|                                                      |                                                                                     | G      | <b>2045002</b> | 0,6    |
|                                                      |                                                                                     |        |                |        |
| <b>Bracket coupler</b>                               |  | G      | <b>2048017</b> | 1,4    |
|                                                      |                                                                                     |        |                |        |
| <b>Coupler Grawlock</b><br>NOTE! Always use in pairs |  | G      | <b>2541000</b> | 0,7    |
|                                                      |                                                                                     |        |                |        |
| <b>Scaffold spanner ratchet</b>                      |  |        | <b>2051023</b> | 0,5    |
| <b>Box spanner</b>                                   |                                                                                     |        | <b>2051000</b> | 0,6    |

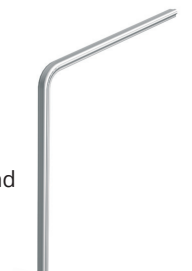


## HAKITEC 750 Weather Protection


|                                                                                                                                                                                                    |                  | Finish | Item No        | Weight |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|--------|----------------|--------|
| <b>750 Frame</b><br>                                                                                              | 1250             | AL     | <b>4032125</b> | 9,4    |
|                                                                                                                                                                                                    | 2250             | AL     | <b>4032225</b> | 16,6   |
|                                                                                                                                                                                                    | 3250             | AL     | <b>4032325</b> | 23,9   |
|                                                                                                                                                                                                    | 6250             | AL     | <b>4032625</b> | 46,0   |
| <b>750 Angle frame</b><br>                                                                                        | 15°              | AL     | <b>4202260</b> | 18,3   |
|                                                                                                                                                                                                    | 22,5°            | AL     | <b>4202261</b> | 17,6   |
|                                                                                                                                                                                                    | 37,5°            | AL     | <b>4202267</b> | 18,0   |
| <b>750 Connector tube</b><br>                                                                                     |                  | G      | <b>7203001</b> | 2,0    |
| <b>Spring pin</b><br>Diameter 12 mm and 16 mm<br>                                                               | Spring pin Ø12   | G      | <b>2113100</b> | 0,1    |
|                                                                                                                                                                                                    | Spring clip Ø 16 | G      | <b>2116000</b> | 0,2    |
| <b>Clevis pin</b><br>                                                                                           | Clevis pin 12x80 | G      | <b>6130049</b> | 0,08   |
|                                                                                                                                                                                                    | R-Clip           | G      | <b>6130441</b> | 0,01   |
| <b>750 Plan brace</b><br>Tube diameter 53 mm<br>NOTE: Normal 48 mm couplers cannot be connected to the tube<br> | 1250x1000        | AL     | <b>4122119</b> | 1,0    |
|                                                                                                                                                                                                    | 1250x2000        | AL     | <b>4122123</b> | 4,0    |
|                                                                                                                                                                                                    | 1655x1000        | AL     | <b>4122124</b> | 4,0    |
|                                                                                                                                                                                                    | 1655x2000        | AL     | <b>4122163</b> | 3,3    |
|                                                                                                                                                                                                    | 1964x1000        | AL     | <b>4122191</b> | 3,6    |
|                                                                                                                                                                                                    | 1964x2000        | AL     | <b>4122193</b> | 4,3    |
|                                                                                                                                                                                                    | 2500x1000        | AL     | <b>4122248</b> | 1,6    |
|                                                                                                                                                                                                    | 2500x2000        | AL     | <b>4122254</b> | 4,9    |
|                                                                                                                                                                                                    | 3050x1000        | AL     | <b>4122298</b> | 1,8    |
| <b>750 Guardrail post</b><br>                                                                                   | 3050x2000        | AL     | <b>4122303</b> | 5,5    |
|                                                                                                                                                                                                    |                  | G      | <b>7203322</b> | 10,5   |

|                                                           |                                                                                     | Finish | Item No        | Weight |
|-----------------------------------------------------------|-------------------------------------------------------------------------------------|--------|----------------|--------|
| <b>750 Swivel coupler</b>                                 | vert. 48                                                                            | G      | <b>2048007</b> | 1,8    |
|                                                           | hor. 48                                                                             | G      | <b>2048008</b> | 1,8    |
|                                                           |    |        |                |        |
| <b>750 Beam adapter</b>                                   |    | G      | <b>7203335</b> | 20,0   |
| <b>750 Beam adapter clamp</b>                             |    | G      | <b>5231617</b> | 1,6    |
| <b>750 Beam adapter</b>                                   |   | G      | <b>7203325</b> | 16,8   |
| <b>750 Y frame</b>                                        |  | G      | <b>7203320</b> | 10,4   |
| <b>Beam adapter compact</b><br>Incl. two clamping devices |  | G      | <b>7203336</b> | 23,4   |
| <b>Beam adapter compact</b><br>Excl. two clamping devices |  | G      | <b>7203326</b> | 20,2   |




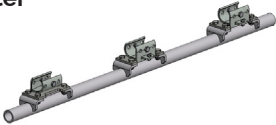

|                                               |                                                                                     |                 | Finish | Item No        | Weight |
|-----------------------------------------------|-------------------------------------------------------------------------------------|-----------------|--------|----------------|--------|
| <b>750 Rolling roof wheel</b>                 |    |                 | G      | <b>7142003</b> | 9,9    |
| <b>750 Anti-lift bracket</b>                  |    |                 | G      | <b>7175049</b> | 3,1    |
|                                               |                                                                                     | Bolt M6S M12x40 | G      | <b>6130323</b> | 0,04   |
|                                               |                                                                                     | Nut M12 Nylon   | Fzb    | <b>6130208</b> | 0,02   |
| <b>750 Anti-Lift bracket adjustable wheel</b> |    |                 | G      | <b>7175062</b> | 10,0   |
| <b>Anti-lift channel</b>                      |   | 3000            | G      | <b>7175050</b> | 16,0   |
|                                               |                                                                                     | 2000            | G      | <b>7175051</b> | 10,6   |
|                                               |                                                                                     | Bolt M6S M12x40 | G      | <b>6130282</b> | 0,06   |
|                                               |                                                                                     | Nut M12 Nylon   | Fzb    | <b>6130267</b> | 0,03   |
| <b>750 Triangular rail</b>                    |  | 2000            | G      | <b>7203332</b> | 31,7   |
|                                               |                                                                                     | 3000            | G      | <b>7203333</b> | 44,0   |
| <b>Band &amp; plate coupler</b>               |  | Upper part      | G      | <b>2044100</b> | 1,3    |
|                                               |                                                                                     | Lower part      | G      | <b>2044101</b> | 0,7    |
| <b>750 Adapter lattice beam</b>               |  |                 | G      | <b>7203337</b> | 6,9    |
| <b>750 Walk board</b>                         |  | 2000            | AL     | <b>7500004</b> | 14,5   |
|                                               |                                                                                     | 2250            | AL     | <b>7500005</b> | 16,3   |

|                                                                                                                                                                                                                                                 |       | Finish | Item No        | Weight |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|--------|----------------|--------|
| <b>750 Sheeting Bar</b><br>                                                                                                                                    | 1250  | G      | <b>7500012</b> | 2,5    |
|                                                                                                                                                                                                                                                 | 1655  | G      | <b>7500026</b> | 3,6    |
|                                                                                                                                                                                                                                                 | 2500  | G      | <b>7500007</b> | 5,5    |
|                                                                                                                                                                                                                                                 | 3050  | G      | <b>7500006</b> | 6,8    |
| <b>750 Pulling device</b><br>For sheeting<br>                                                                                                                  | 1250  | G      | <b>7500011</b> | 7,8    |
|                                                                                                                                                                                                                                                 | 1655  | G      | <b>7500025</b> | 9,4    |
|                                                                                                                                                                                                                                                 | 1964  | G      | <b>7500017</b> | 10,6   |
|                                                                                                                                                                                                                                                 | 2500  | G      | <b>7500009</b> | 12,6   |
|                                                                                                                                                                                                                                                 | 3050  | G      | <b>7500008</b> | 14,8   |
| <b>750 Tension bar</b><br>                                                                                                                                     | 1250  | G      | <b>7500013</b> | 5,9    |
|                                                                                                                                                                                                                                                 | 1655  | G      | <b>7500027</b> | 7,6    |
|                                                                                                                                                                                                                                                 | 1964  | G      | <b>7500040</b> | 7,0    |
|                                                                                                                                                                                                                                                 | 2500  | G      | <b>7500014</b> | 10,6   |
|                                                                                                                                                                                                                                                 | 3050  | G      | <b>7500015</b> | 12,9   |
| <b>750 Tension tube</b><br>                                                                                                                                  | 1250  | G      | <b>7500024</b> | 4,3    |
|                                                                                                                                                                                                                                                 | 1655  | G      | <b>7500028</b> | 5,9    |
|                                                                                                                                                                                                                                                 | 1964  | G      | <b>7500042</b> | 5,6    |
|                                                                                                                                                                                                                                                 | 2500  | G      | <b>7500023</b> | 9,2    |
|                                                                                                                                                                                                                                                 | 3050  | G      | <b>7500022</b> | 11,3   |
| <b>750 Ridge roller frame</b><br>                                                                                                                            | 1250  | G      | <b>7500018</b> | 11,2   |
|                                                                                                                                                                                                                                                 | 1655  | G      | <b>7500019</b> | 13,9   |
|                                                                                                                                                                                                                                                 | 1964  | G      | <b>7500041</b> | 16,0   |
|                                                                                                                                                                                                                                                 | 2500  | G      | <b>7500020</b> | 17,9   |
|                                                                                                                                                                                                                                                 | 3050  | G      | <b>7500021</b> | 20,5   |
| <b>750 Ridge track</b><br>Roof pitch 15°, 22,5° or 37,5°<br>Without 7540001 erected<br>Track joiner AL<br>Marked with item No. in one end<br>                | 15°   | AL     | <b>7541015</b> | 2,8    |
|                                                                                                                                                                                                                                                 | 22.5° | AL     | <b>7541022</b> | 2,8    |
|                                                                                                                                                                                                                                                 | 37.5° | AL     | <b>7541037</b> | 3,0    |
|                                                                                                                                                                                                                                                 |       |        |                |        |
| <b>750 Straight track</b><br>L=1250, 2250, 3250 and 6250 mm<br>With 7540001 Track joiner AL<br>erected in upper end<br>Marked with item No. in upper end<br> | 1250  | AL     | <b>7541125</b> | 2,6    |
|                                                                                                                                                                                                                                                 | 2250  | AL     | <b>7541225</b> | 4,7    |
|                                                                                                                                                                                                                                                 | 3250  | AL     | <b>7541325</b> | 6,7    |
|                                                                                                                                                                                                                                                 | 6250  | AL     | <b>7541625</b> | 12,9   |

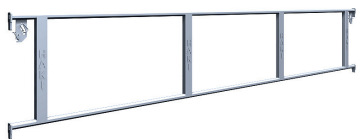
|                                                                                                                                                              |                                                                                     | Finish   | Item No           | Weight |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------|-------------------|--------|
| <b>750 End track takfot</b><br>Roof pitch 15°, 22,5° alt. 37,5°<br>With 7540001 Track joiner AL<br>erected in upper end<br>Marked with item No. in upper end |    | 15°      | AL <b>7541150</b> | 3,3    |
|                                                                                                                                                              |                                                                                     | 22,5°    | AL <b>7541220</b> | 3,3    |
|                                                                                                                                                              |                                                                                     | 37,5°    | AL <b>7541370</b> | 3,3    |
|                                                                                                                                                              |                                                                                     |          |                   |        |
| <b>750 Straight track 130</b>                                                                                                                                |    | AL       | <b>7541013</b>    | 0,4    |
| <b>750 Track Fall protection anchor</b>                                                                                                                      |    | G        | <b>7541006</b>    | 7,6    |
| <b>750 Holder for sheeting</b>                                                                                                                               |   |          | <b>7541011</b>    | 2,9    |
| <b>750 Fall protection anchor with ridge track</b><br>For HAKITEC 750 with HAKI Trak<br>With ridge track roof pitch<br>15° alt. 22,5°                        |  | 15°      | <b>7541007</b>    | 10,4   |
|                                                                                                                                                              |                                                                                     | 22,5°    | <b>7541008</b>    | 10,4   |
| <b>750 Track Eaves roller bracket</b><br>For sheeting                                                                                                        |  | G        | <b>7500010</b>    | 7,4    |
| <b>750 Swivel coupler SW</b><br>Jaw width 22 mm<br>For Frame 750 AL                                                                                          |  | vert. 48 | G <b>2048007</b>  | 1,8    |
|                                                                                                                                                              |                                                                                     | hor. 48  | G <b>2048008</b>  | 1,8    |
| <b>750 Track Joint plate</b>                                                                                                                                 |  | G        | <b>7540000</b>    | 0,2    |
| <b>750 Track Joiner</b>                                                                                                                                      |  | AL       | <b>7540001</b>    | 0,01   |

|                                                                                                                                                                                   |                                                                                     | Finish | Item No                          | Weight     |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------|----------------------------------|------------|
| <b>750 Track seal</b>                                                                                                                                                             |    |        | <b>7540002</b>                   | 0,1        |
| <b>750 Ratchet strap</b>                                                                                                                                                          |    |        | <b>7540003</b>                   | 0,5        |
| <b>750 Track Saddle clamp</b><br>Erected on framework 750 AL with one<br>2113100 12 mm Spring pin<br>NB! The 2113000 12 mm Spring clip is not<br>recommended for this application |    | Fzb    | <b>7541000</b>                   | 0,5        |
| <b>750 Track End bracket</b><br>Erected on framework 750 AL with one<br>2113100 12 mm Spring pin<br>NB! The 2113000 12 mm Spring<br>clip is not recommended for this application  |   | Fzb    | <b>7541002</b>                   | 1,3        |
| <b>Combi spanner ratchet</b><br>With catch                                                                                                                                        |  |        | <b>2051019</b><br><b>2051021</b> | 0,3<br>0,3 |
| <b>Track Coupler clamp</b><br>Jaw width 22 mm                                                                                                                                     |  |        | <b>2048030</b>                   | 1,0        |
| <b>Track Clamp pocket</b><br>With pocket fastening<br>Jaw width 22 mm                                                                                                             |  | Fzb    | <b>7541003</b>                   | 1,0        |
| <b>Guide Track sheet</b><br>For sheeting                                                                                                                                          |  | G      | <b>7541005</b>                   | 1,1        |

## TKS 750 Weather Protection

|                                                                                |                                                                                     |                           | Finish | Item No        | Weight |
|--------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------|--------|----------------|--------|
| <b>TKS 750 Frame</b><br>2 psc 7203001 and 4 psc bolt<br>and nut per frame      |    | 1250                      | AL     | <b>7570125</b> | 12,2   |
|                                                                                |                                                                                     | 2250                      | AL     | <b>7570225</b> | 21,2   |
|                                                                                |                                                                                     | 3250                      | AL     | <b>7570325</b> | 31,2   |
| <b>TKS 750 Angle frame</b>                                                     |    | 15,0°                     | AL     | <b>7570015</b> | 23,2   |
|                                                                                |                                                                                     | 22,5°                     | AL     | <b>7570025</b> | 19,6   |
|                                                                                |                                                                                     | 37,5°                     | AL     | <b>7570035</b> | 21,9   |
| <b>TKS 750 Guide sheet</b>                                                     |    |                           |        | <b>7541027</b> | 0,8    |
| <b>TKS 750 Frame adapter</b>                                                   |  |                           | AL     | <b>7570009</b> | 8,9    |
| <b>TKS 750 Beam bracket</b><br>Used for 7570009<br>NOTE: 2 pcs clamping device |  |                           | G      | <b>7570007</b> | 4,7    |
| <b>TKS 750 Clamping device</b>                                                 |  |                           | G      | <b>5231679</b> | 1,3    |
| <b>TKS 750 Frame seal</b>                                                      |  |                           |        | <b>7570001</b> | 0,1    |
| <b>750 Connetor tube</b><br>NOTE: Bolt 6130588 and<br>nut 6130587              |  |                           | G      | <b>7203001</b> | 2,0    |
| <b>Clevis pin</b>                                                              |  | Clevis pin 12x80          | G      | <b>6130049</b> | 0,08   |
|                                                                                |                                                                                     | R-clip                    | G      | <b>6130441</b> | 0,01   |
|                                                                                |                                                                                     | Lifting eye nut with bolt |        | <b>7570003</b> | 1,0    |

|                                 |      | Finish | Item No        | Weight |
|---------------------------------|------|--------|----------------|--------|
| <b>Guardrail frame GFL- Fzv</b> | 2500 | G      | <b>7052254</b> | 9,2    |
| With spring locking catch       | 3050 | G      | <b>7052304</b> | 10,3   |



## TKS 750 Guardrail SKR

With spring locking catch

3050

G

**7056301**

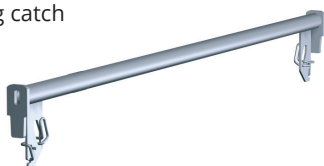
7,1

2500

G

**7056246**

6,0



## 750 Plan brace

Tube diameter 53 mm

NOTE: Normal 48 mm couplers

cannot be connected to

the tube

AL

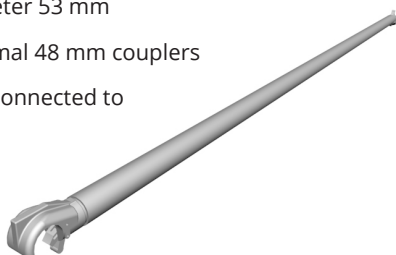
**4122254**

4,9

AL

**4122303**

5,5



## TKS Sheeting

Color on the cape HAKI Standard

L= 8000 Gray

8000x3050

**2800300**

9,3

L=10000 White

10000x3050

**2800301**

11,6

L=12000 Red

12000x3050

**2800302**

13,9

L=14000 Blue

14000x3050

**2800303**

16,2

Other widths on request

**HAKI Trak Sheeting**

| Finish | Item No | Weight |
|--------|---------|--------|
|--------|---------|--------|

**HAKI Trak sheeting**

PVC-coated polyester fabric

With keder beading

Produced to length and width as required

Flame-resistant according to Euroclass

13501-1: B-s2,d0


**HAKI Trak pelmet sheeting**

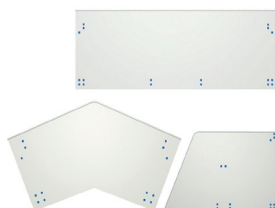
With keder beading on one side

Width 935 mm

NB! Only covers framework

Flame-resistant according to Euroclass

13501-1: B-s2,d0


**HAKITEC Sheeting**

| Finish | Item No | Weight |
|--------|---------|--------|
|--------|---------|--------|

**HAKITEC 180 FR**

3,2 x 30 m

**2034056**

27,0

Armed plastic sheet, 180 g/m<sup>2</sup>

Euroclass 13501-1: B-s3,d0

**HAKITEC 320 FR**

3,2 x 30 m

**2034057**

31,0

Armed plastic sheet, 320 g/m<sup>2</sup>

Euroclass 13501-1: B-s3,d0

**Knitted Net FR**

3,1 x 50 m

**2034055**

12,0

80 g/ m<sup>2</sup>

Euroclass 13501-1: B-s3,d0

**Knitted Net FR**

3,2 x 50 m

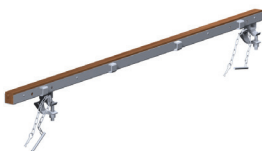

**2034051**

21,0

140 g/ m<sup>2</sup>

Euroclass 13501-1: B-s3,d0

### Fixing HAKITEC sheet

|                                                                                                                                                                         |                                                                                     | Finish | Item No        | Weight |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------|----------------|--------|
| <b>Toggle</b><br>Expect to use a canvas tensioner<br>for every 1,5 m² façade area<br>Toggles are delivered 100/package.                                                 |    |        | <b>2032100</b> | 0,03   |
|                                                                                                                                                                         |                                                                                     |        | <b>2032300</b> | 0,01   |
| <b>Fixing beam</b><br>Jaw width 22 mm                                                                                                                                   |    |        | <b>7207096</b> | 5,0    |
|                                                                                                                                                                         |                                                                                     |        | <b>7207191</b> | 8,0    |
| <b>Fixing plate HAKITEC</b><br>Expect to use 6 construction metal screws per<br>covering plate as well as 2 per<br>ridge plate<br>Fixing screw is delivered 250/package |    |        | <b>2114000</b> | 0,01   |
|                                                                                                                                                                         |                                                                                     | G      | <b>7251200</b> | 3,3    |
|                                                                                                                                                                         |                                                                                     | G      | <b>7252001</b> | 0,8    |
| <b>Sheeting rail 750</b><br>For HAKITEC canvas in 750 roof                                                                                                              |  |        | <b>7213245</b> | 10,3   |
|                                                                                                                                                                         |                                                                                     | G      | <b>7213300</b> | 11,6   |

### Canopy roof

|                                                                                                                                                                                                                                                       |                                                                                     | Finish | Item No        | Weight |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------|----------------|--------|
| <b>Canopy roof</b><br>Canopy support = bay width 700-770 mm<br>Canopy support + 1 ext. tube<br>= bay width 1050-1250 mm<br>Canopy support + 2 ext. tubes<br>= bay width 1655 mm<br>GFL and LBL are used as canvas<br>supports between canopy supports |  | G      | <b>7014001</b> | 18,0   |
|                                                                                                                                                                                                                                                       |                                                                                     | G      | <b>7014002</b> | 3,5    |
| <b>Canopy roof support</b><br>To be fitted directly onto<br>the top of a standard<br>A standard is used as an extension<br>tube, maximum standard S 1000<br>Maximum width of the canopy roof<br>=1275 mm                                              |  | G      | <b>7014003</b> | 7,0    |

|                    |      | Finish | Item No        | Weight |
|--------------------|------|--------|----------------|--------|
| Guardrail foldable | 3050 |        | <b>7059170</b> | 150,0  |



Beam for lifting 1000kg

**4171191** 29,00









